

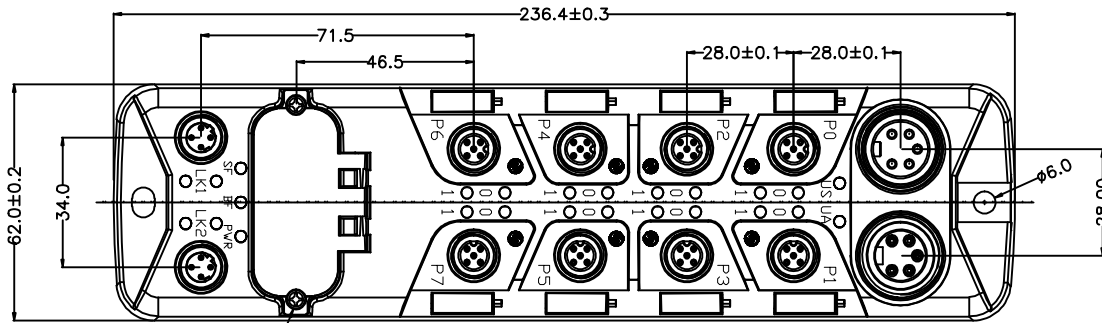



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/02/28	ZK



2-M3*0.5螺钉



不带LOGO




Electrical character(connector)
M12A/5P:Rating voltage: 60V AC/DC
Rating current: 4A
M12D/4P:Rating voltage: 250V AC/DC
Rating current: 4A
7/8 4P:Rating voltage: 300V AC/DC
Rating current: 8A

Insulation resistance: >100MΩ
Contact resistance ≤10mΩ

Shell material:
Anodizing of aluminum alloy (primary color)

*.ALL MATERIALS ARE RoHS COMPLIANT.

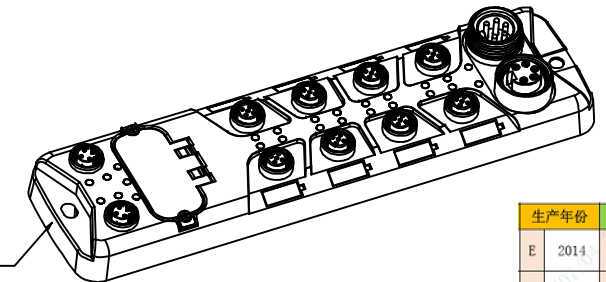

镭雕
(先镭雕再装配)

年份, 依实际

SN-N7ILM010001

月份, 依实际 流水号, 第一个产品0001, 下个0002...

生产年份	生产月份	
E 2014	1	1月
F 2015	2	2月
G 2016	3	3月
H 2017	4	4月
I 2018	5	5月
J 2019	6	6月
K 2020	7	7月
L 2021	8	8月
M 2022	9	9月
N 2023	A	10月
O 2024	B	11月
...	...	C 12月

13	GL00002	BLACK EPOXY RESIN	40	G
12	GL00029	TRANSPARENT EPOXY RESIN	15	G
11	GL00024	TRANSPARENT SILICONE	5	G
10	N/A	PCB BOARD(WITH COMPONENTS)	1	SET
9	780005-04-018	7/8 5P FEMALE FRONT FASTENED CONNECTOR	1	SET
8	780005-03-018	7/8 5P MALE FRONT FASTENED CONNECTOR	1	SET
7	120404-04-082	M12 D CODING 4P FEMALE FRONT FASTENED CONNECTOR	2	SET
6	120105-04-146	M12 A CODING 5P FEMALE FRONT FASTENED CONNECTOR	8	SET
5	SW00038	SCREW M3*0.5	7	PCS
4	LE00021	LIGHT GUIDE	25	PCS
3	OR00284	WATERPROOF RUBBER PAD	1	PCS
2	CN01313	I/O JUNCTION BOX TRANSPARENT WINDOW COVER	1	PCS
1	CN01314-2	I/O JUNCTION BOX HOUSING (ABS+PC)	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT



Shen Zhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE: 主站配线盒 (M12 5P A/F*8+M12 4P D/F*2+7/8 5P/M+7/8 5P/F)(不带LOGO)

SGN NO	920105-08-034-1	REV.
DWG NO		
CUSTOMER		SO

TOLERANCES ARE:	THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	SIZE: A4
.x ±0.2	.x' ±2.0'	UNITS: mm
xx ±0.10	.x' ±1.0'	SCALE: 1:1
		SHEET: OF 2