


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/08/21	YZH

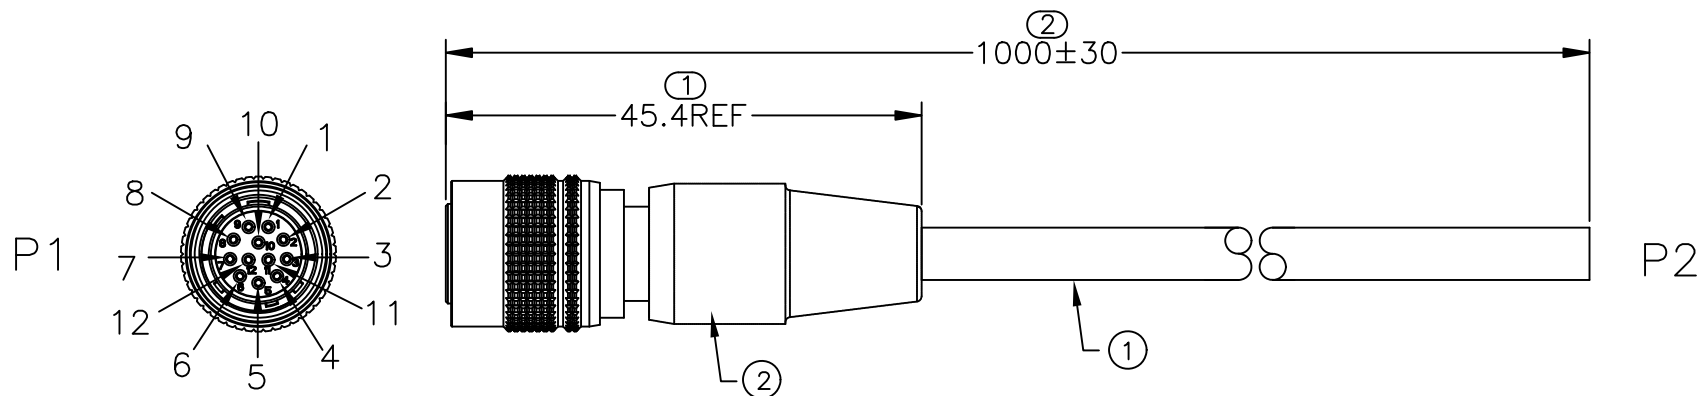

WIRE LIST

P1	PAIR	COLOR	P2
1	XX	BLACK	OPEN
2		WHITE/BLACK	
3	XX	RED	
4		WHITE/RED	
5	XX	YELLOW	
6		BLACK/YELLOW	
7	XX	ORANGE	
8		WHITE/ORANGE	
9	XX	BROWN	
10		WHITE/BROWN	
11	XX	GREEN	
12		WHITE/GREEN	
SHELL		BRAID	

Electrical character

Rated voltage	AC 100V/DC 140V
Rated current	2.0A
Mechanical characteristics (mating cycle)	>500
Degree of protection (ISO-20653, IEC60529)	
Operating temperature (depending on cable quality)	-25°C ~ +80°C
Destructive withstand force between connector and overmold exceeds	
Tightening torque (range)	
Pollution degree	3

ALL MATERIALS ARE RoHS COMPLIANT

SIGNAL[®]
Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE PUSH-PULL SELF-LOCKING 12PIN FEMALE TO OPEN CABLE	
SGN NO 950112-06-001	REV.
DWG NO	SO
CUSTOMER	
TOLERANCES ARE: DECIMALES ANGLES	THIRD ANGLE PROJECTION
.x ±0.5 x.' ±2.0° .xx ±0.20 .x' ±1.0°	SIZE: A4 UNITS: mm
	SCALE: 1:1 SHEET: 1 OF 1

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
②	950112-21-001	PUSH-PULL SELF-LOCKING 12PIN FEMALE CONNECTOR (FABRICATED TYPE)	1	SET
①	YDCA0797	UL20276 26AWG*6P+AL+B JACKET BLACK PVC OD7.0mm	1	PCS