





PROJECT NO:
SGNYD1709001

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2019/07/15	YMX

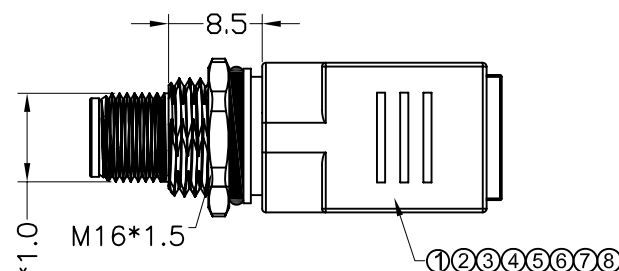

Recommended
Panel Cut-Off

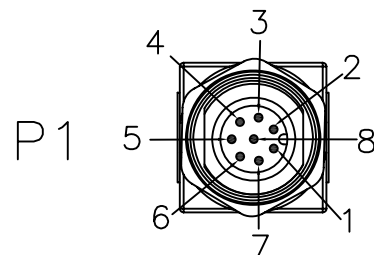

P2

TESTING CONDITIONS:

1. VOLTAGE:300V DC/0.1S.
2. INSULATION RESISTANCE: 10 Mohms min.
3. CONDUCTIVE RESISTANCE: 5 Ohms max.
- 4.100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST

P1	COLOR	P1
1	WHITE	1
2	BROWN	2
3	GREEN	3
4	YELLOW	4
5	GRAY	5
6	PINK	6
7	BLUE	7
8	RED	8
SHELL	BLACK	SHELL

⑧	PL00007	HD PE	3	g
⑦	PL00008	BLACK PVC 30P	10	g
⑥	OR00008	O-Ring GREEN FKM ϕ 13.0* ϕ 2.0mm	1	PCS
⑤	NU00008	M16 Brass plated ni NUT L*W=2.8*19mm	1	PCS
④	WK00195	M12 M Brass plated ni front mount M16*1.5 L=20.75mm	1	PCS
③	N/A	M12 A Coding 8pin male connector	1	SET
②	CN00222	RJ45 8P8C STRAIGHT ANGLE WITH SHEILD	1	PCS
①	N/A	UL1061 24AWG HOOK UP WIRE	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT



ShenZhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE	M12 A CODING 8P/M TO RJ45/F ADAPTER		
SGN NO	120108-10-014	REV.	
DWG NO	SPM12SA08006	S0	
CUSTOMER			
TOLERANCES ARE:	DECIMALES	ANGLES	THIRD ANGLE PROJECTION
.x $\pm$ 0.50	x.' $\pm$ 2'		SIZE: A4
.xx $\pm$ 0.20	.x' $\pm$ 1'		UNITS: mm
			SCALE: SHEET: 1 OF 1