


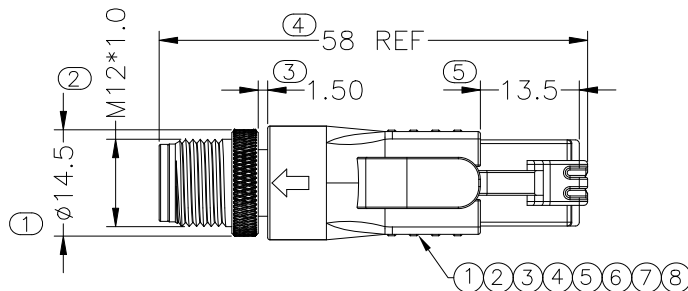



PROJECT NO:		REV		DESCRIPTION		DATE		APPROVED	
SGNXXXXXX		S0		CREATED DRAWING		2024/06/14		W N	

P1

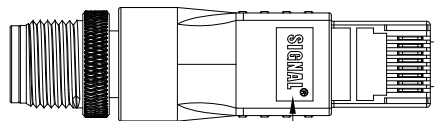


P2

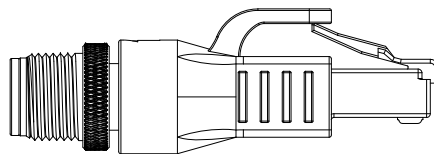

LOGO → SIGNAL®

2:1

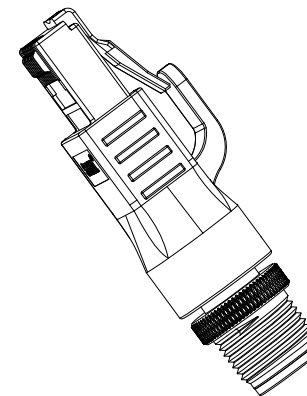

Electrical character

Rated voltage	250V
Rated current	4A
Mechanical characteristics (mating cycle)	>100
Degree of protection (ISO-20653, IEC60529)	IP20
Operating temperature	-25°C ~ +80°C
Tightening torque (range)	0.4~1.6Nm
Pollution degree	3

ALL MATERIALS ARE RoHS COMPLIANT

WIRE LIST

P1	COLOR	P2
1	WHITE/GRENN	1
3	GREEN	2
2	WHITE/ORANGE	3
4	ORANGE	6
SHELL	BLACK	SHELL


⑧	CF00007	DOUBLE-SIDED COPPER FOIL W15*0.06mm L=25mm	1	PCS
⑦	PL00011	BLACK PVC 45P	7	g
⑥	PL00120	LD-PE	3	g
⑤	CN00486	RJ45 8P8C CONNECTOR	1	PCS
④	120404-20-038	M12 D CODING 4PIN MALE CONNECTOR WITH SHIELD	1	SET
③	CA00606	TWISTED PAIR 24AWG*1P HD-PE OD1.0mm GREEN/WHITE GREEN	1	PCS
②	CA00605	TWISTED PAIR 24AWG*1P HD-PE OD1.0mm ORANGE/WHITE ORANGE	1	PCS
①	CA00020	UL1007 24AWG HOOK-UP WIRE BLACK	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT



Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE				M12 D 4P/M TO RJ45 M ADAPTER			
SGN NO		120404-10-034			REV.		
DWG NO		SGN01664-0000					
CUSTOMER					S0		
TOLERANCES ARE:				THIRD ANGLE PROJECTION			
DECIMALES		ANGLES		SIZE: A4		UNITS: mm	
.x ±0.5		x.° ±2.0°		SCALE: 1:1		SHEET: 1 OF 1	
.xx ±0.20		.x.° ±1.0°					