
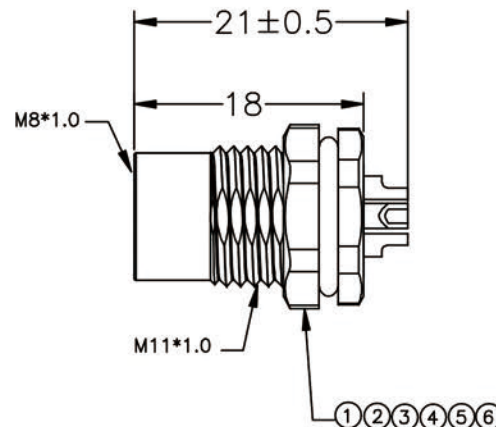


RECOMMEND
PANEL CUT-OUT



Detailed Product Description:
Waterproof connector rating is IP68
They can not be used permanently under water.

Connector Electrical character
Rating voltage: 60V ,
Insulation resistance: >100MΩ
Rating current : 3A
Contact resistance of connector ≤5mΩ
Mechanical characteristics: mating / cycle >100
cycle
Operating temperature: -25°C ~ +85°

*ALL MATERIALS ARE RoHS COMPLIANT.



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2017/11/01	YMX

 SIGNAL® ShenZhen Signal Electronics co.,Ltd		TITLE M8 A 3P/F FRONT MOUNT CONNECTOR	
		SGN NO 080103-04-004	REV. S0
DRAWN BY	DATE	DWG NO	CUSTOMER
CHECKED BY	DATE		
APPROVED BY	DATE	TOLERANCES ARE:	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES
		.x ±0.5	x' ±2.0'
		.xx ±0.20	.x' ±1.0'
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1