
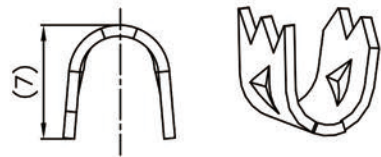


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2022/05/05	ZCH



ATTACHED

Detailed product description:

Connector electrical character

Rating voltage: 100V AC, 140V DC,

Rating current : 2A

Insulation resistance: >1000M ohms

Contact resistance of connector $\leq 10\text{m ohms}$

Dielectric withstanding voltage: 300V AC R.M.S.Max.

Mechanical characteristics:

Mating cycles >500 cycles





Operating temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Storage temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Cable OD: $\phi 5.0\text{mm}$

Applicable Wire: $0.15\text{mm}^2(26\text{AWG})$,

*All materials are RoHS compliant.

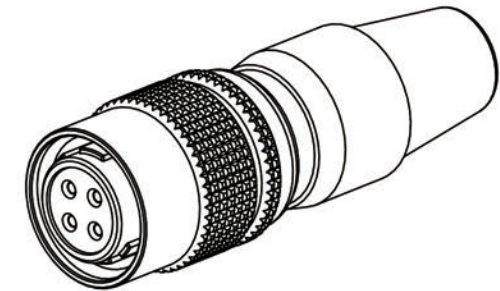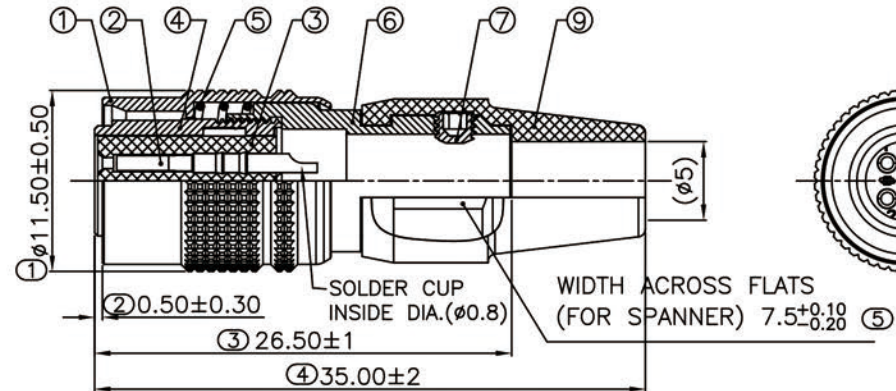

 SIGNAL®		TITLE		PUSH PULL 4PIN PLUG (SOLDER TYPE)	
Shenzhen Signal Electronics co.,Ltd		SGN NO		950104-21-001	
DRAWN BY		DATE		REV.	
CHECKED BY		DATE		SO	
CHECKED BY		DATE			
APPROVED BY		DATE		CUSTOMER	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:		THIRD ANGLE PROJECTION	
		DECIMALES		ANGLES	
		.x ±0.5		x." ±2.0°	
		.xx ±0.20		.x' ±1.0°	
				SIZE: A4	
				SCALE: 1:1	
				UNITS: mm	
				SHEET: 1 OF 1	