




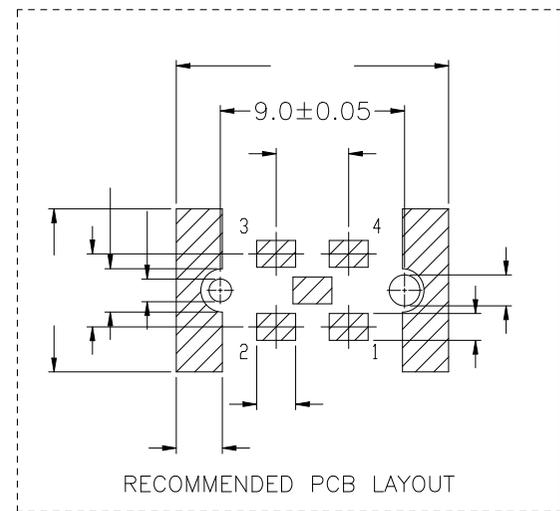
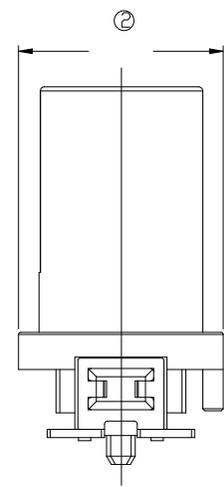
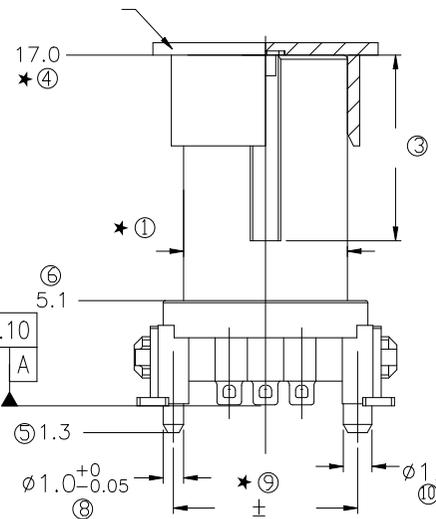
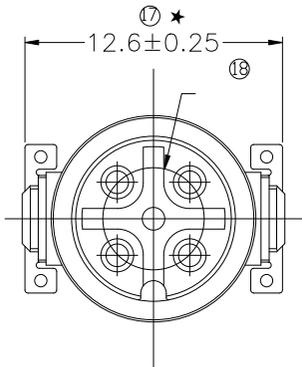


REV	DESCRIPTION	DATE	APPROVED
S0	UPDATE DRAWING	2019/06/05	CRB

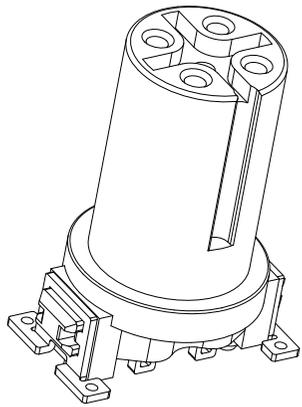

TAPE AND REEL WITH CAP /100 PCS

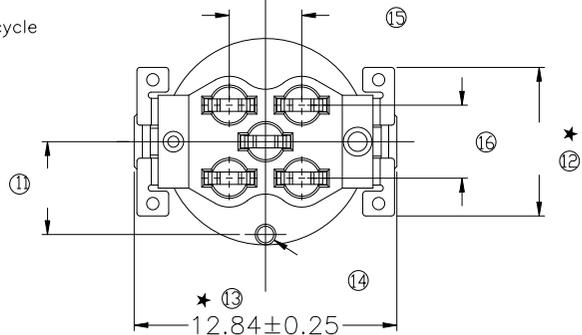

Detailed Product Description
 Connector electrical characteristics:
 Rating voltage: 60V
 Insulation resistance: >100MΩ
 Rating current: 4A
 Contact resistance of connector ≤5mΩ
 Mechanical characteristics: mating / cycle >100 cycle
 Termination: SMT
 PINS: 5
 CODING: A
 Configuration: M12, female / stamped contacts
 The highest temperature: 265°C
 According to IEC61076-2-101
 Marked "★" for key inspection dimensions

*ALL MATERIALS ARE RoHS COMPLIANT.

SIGNAL [®] Shenzhen Signal Electronics Co., LTD		TITLE	
		M12 A 5P/F SMT CONNECTCOR	
DRAWN BY		SGN NO	REV.
DATE		120105-04-023	
CHECKED BY		DWG NO	
DATE		CUSTOMER	S0
APPROVED BY		TOLERANCES ARE:	
DATE		DECIMALES	ANGLES
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		.x ±0.15	x.' ±1.0'
		.xx ±0.10	.x' ±0.5'
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1