
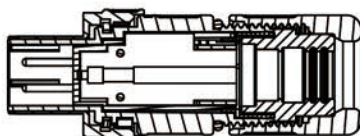
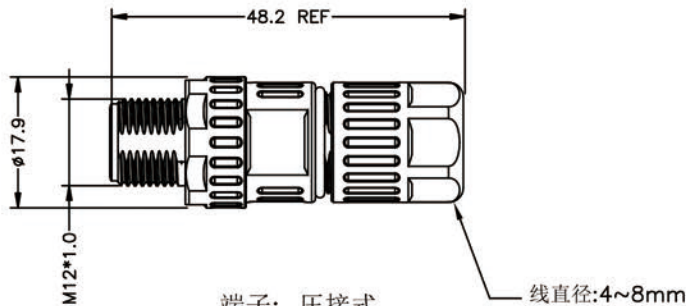


PROJECT NO:
SGNYD2308061

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/08/18	LY



说明:

1.电气特性

额定电压: 交流/直流250V

绝缘电阻: > 100MΩ

额定电流: 4A

连接器的接触电阻≤10mΩ

2.机械特性


插拔/周期 >100 cycle

3.环境特性

防护等级: IP67

操作温度: -25°C ~ + 85°C

4.所有材料都符合RoHS标准

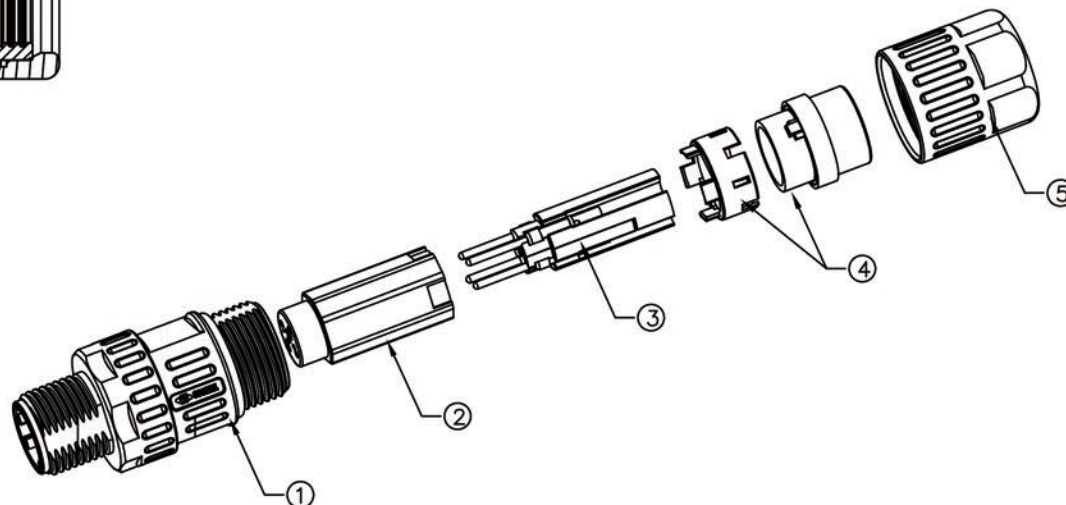

ShenZhen Signal Electronics co., Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE
M12D型4芯公头金属装配式

SGN NO	120404-01-040	REV.
DWG NO		
CUSTOMER		S0

TOLERANCES ARE:	THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	
.x ±0.5	x.* ±2.0°	SIZE: A4
.xx ±0.20	.x.* ±1.0°	UNITS: mm
	SCALE: 1:1	SHEET: 1 OF 1