
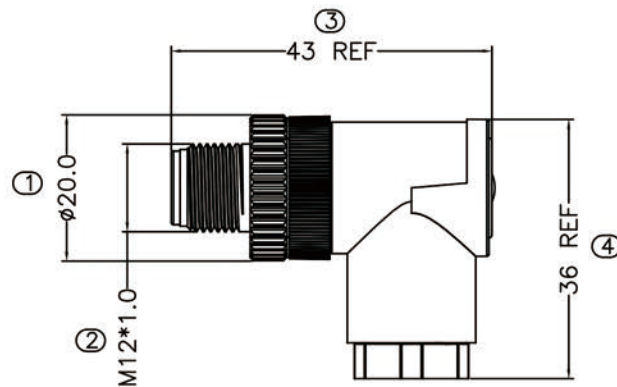


REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2025/07/04	PWT



说明:

1.电气特性

额定电压: 交流/直流60V

额定电流: 4A

连接器的接触电阻 $\leq 10\text{m}\Omega$

绝缘电阻: $> 100\text{M}\Omega$

2.机械特性

插拔/周期 > 100 cycle



3.环境特性

防护等级: IP67

操作温度: $-25^{\circ}\text{C} \sim + 85^{\circ}\text{C}$

4.所有材料都符合RoHS标准。

5.用吸塑盒包装。

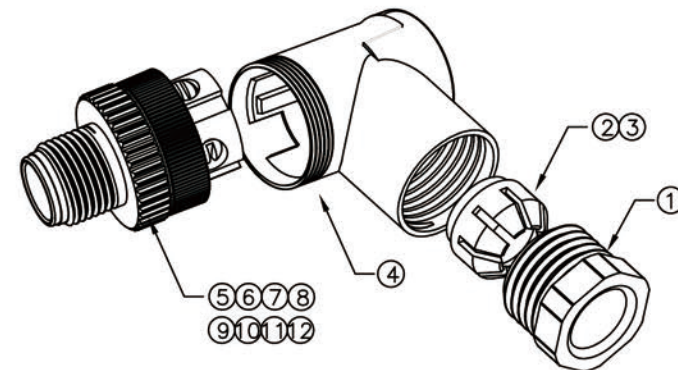

 SIGNAL®		TITLE M12 A 8P MALE PLASTIC ASSEMBLY CONNECTOR(PG9)	
Shenzhen Signal Electronics Co., LTD		SGN NO 120108-01-004	
DRAWN BY	DATE	DWG NO	REV.
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE	A0	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES	ANGLES
		.x ±0.5	x.' ±2.0°
		.xx ±0.20	x.' ±1.0°
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1