

RECOMMENDED
PANEL CUT-OUT

说明:

1. 电气特性

额定电压: 交流/直流60V,

绝缘电阻: > 100MΩ

额定电流: 4A

连接器的接触电阻≤5mΩ

2. 机械特性: 插拔/周期 >100 cycle

3. 环境特性




防护等级: IP67

操作温度: -25° C ~ + 85° C


4. 所有材料都符合RoHS标准。

5. 静电袋包装: 每PCS装一袋。

6. 先铆压公端子, 再将公胶芯铆压外壳, 最后铆压母胶芯

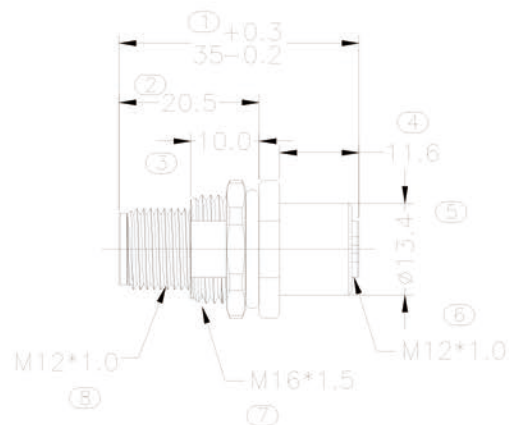

端子铆压高度



CN00093母头胶芯
裁切长度



Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED

TITLE
M12 B 5P/M TO 5P/F
ADAPTER

SGN NO	120205-10-001	REV.
DWG NO	SGN01018-358	
CUSTOMER		A0

TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES	SIZE: A4
ANGLES	UNITS: mm
× ±0.5	× ±2.0
× ±0.20	× ±1.0
SCALE: 1:1	SHEET: 1 OF 1