




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2025/07/10	PWT

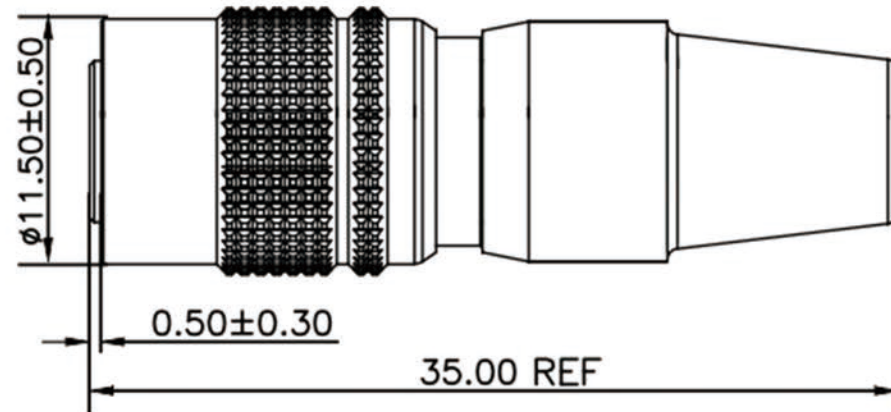

Electrical character

Rated voltage	140V
Rated current	2A
Mechanical characteristics (mating cycle)	>100
Degree of protection (ISO-20653,IEC60529)	IP67
Operating temperature (depending on cable quality)	-25°C ~ +85°C
Destructive withstand force between connector and overmold exceeds	5kgf
Tightening torque (range)	0.4~1.8Nm
Pollution degree	3

ALL MATERIALS ARE RoHS COMPLIANT

 SIGNAL® Shenzhen Signal Electronics co.,Ltd		TITLE HR 10PIN CONNECTOR		
DRAWING BY	DATE	SGN NO 950110-21-001	REV.	
CHECKED BY	DATE	DWG NO	S0	
CHECKED BY	DATE	CUSTOMER		
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES		THIRD ANGLE PROJECTION 
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		.x ±0.5 .xx ±0.20		x." ±2.0" x.'" ±1.0"
		SIZE: A4	UNITS: mm	
		SCALE:	SHEET: 1 OF 1	