


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/02/28	ZK

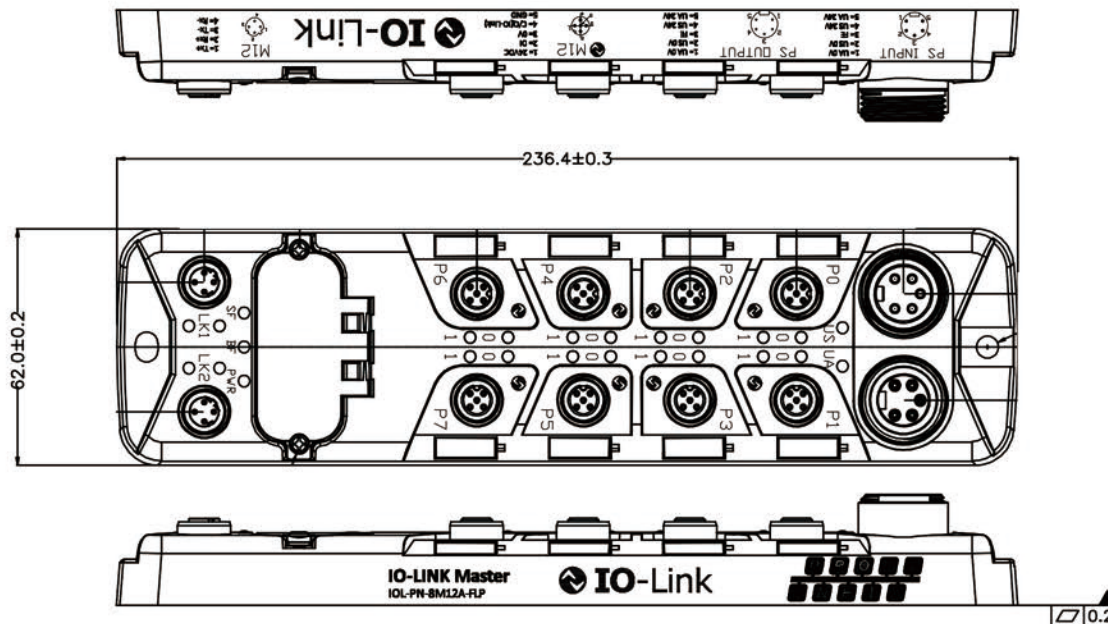

Electrical character(connector)
M12A/5P:Rating voltage: 60V AC/DC
Rating current: 4A
M12D/4P:Rating voltage: 250V AC/DC
Rating current: 4A
7/4P:Rating voltage: 300V AC/DC
Rating current: 8A

Insulation resistance: >100MΩ
Contact resistance ≤10mΩ

Shell material:
Anodizing of aluminum alloy (primary color)

*.ALL MATERIALS ARE RoHS COMPLIANT.

 Shen Zhen Signal Electronics co.,Ltd		TITLE: 主站塑胶分线盒 (M12 5P A/F*8+M12 4P D/F*2+7/8 5P/M+7/8 5P/F)(不带LOGO)	
		SGN NO	920105-08-034-1
DRAWN BY	DATE	DWG NO	REV.
CHECKED BY	DATE	CUSTOMER	S0
CHECKED BY	DATE		
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES	ANGLES
		.x ±0.2.	x.* ±2.0°
		xx ±0.10	.x.* ±1.0°
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: OF 2