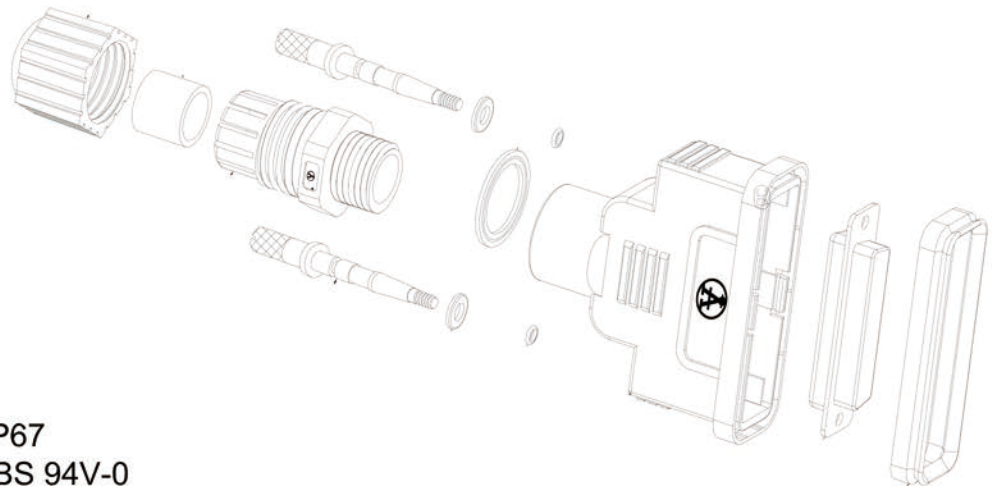

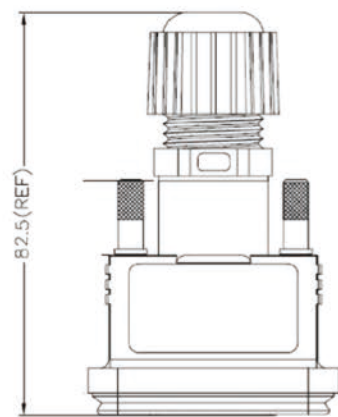




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/08/30	ZCH



Material:

- . Waterproof rate: IP67
- . Housing: Black, ABS 94V-0
- . Contact Carrier: PBT, UL Recognized
- . Contact Pin: Copper Alloy
- . Contact Surface: Gold plated
- . Temperature range: -20°C to 60°C
- . Connector: HD-SUB 26pin Female or Male Shielded (solder pin)
- . Seals for cable: OD: $\varnothing 6.0\text{mm} \sim \varnothing 10.0\text{mm}$
- . One set unassembled in one(1) PE bag

 SIGNAL®		TITLE HDB 26/F Plastic Assembly type (OD:6.0-10.0)	
Shenzhen Signal Electronics Co., LTD		SGN NO 910226-02-011	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES ANGLES	
		.x ±0.5	x.* ±2.0°
		.xx ±0.20	.x* ±1.0°
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1