




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/11/20	CRB

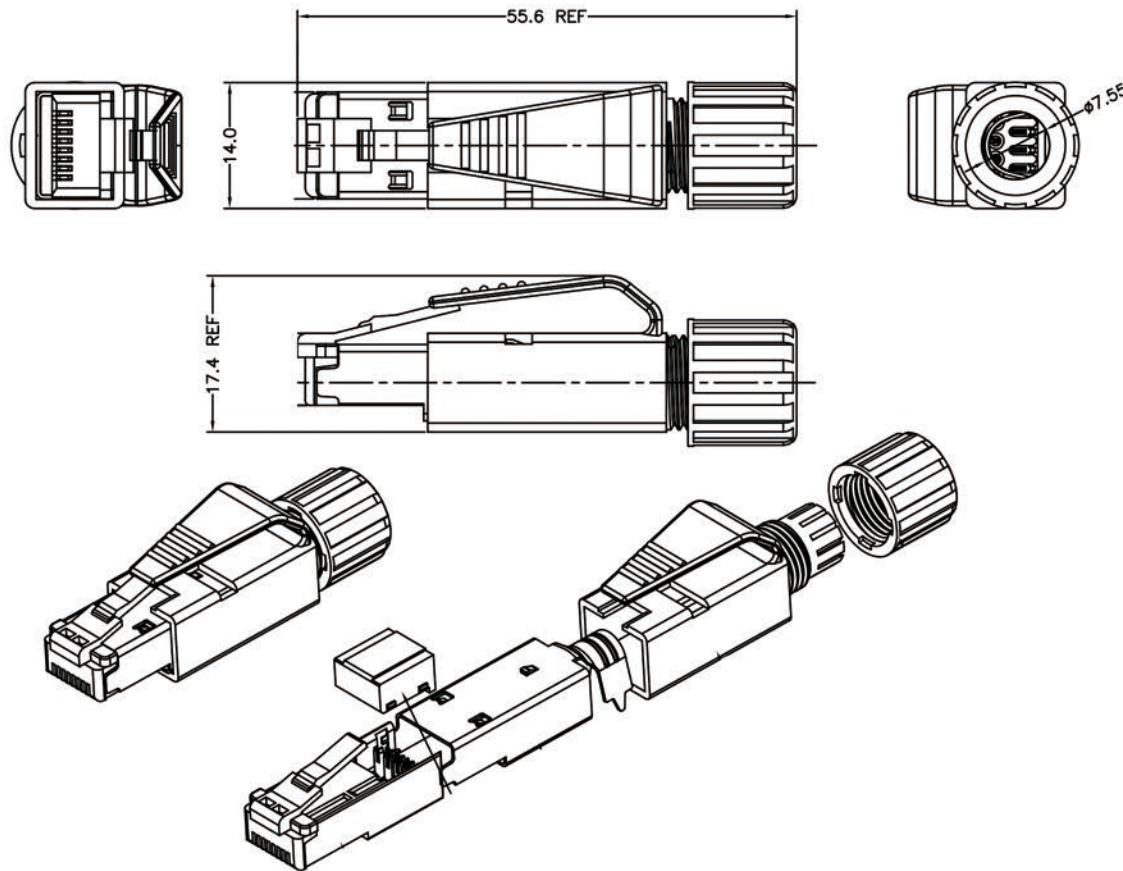

Detailed Product Description  
Connector electrical characteristics:  
Rating voltage: 30V  
Insulation resistance: >1000MΩ  
Rating current: 0.5A  
Contact resistance of connector ≤30mΩ  
Mechanical characteristics: mating / cycle >750 cycle  
Operating temperature: -20°C ~ +70°C  
Cable OD: 5.0~7.0(mm)  
Wire OD: 0.8~1.0(mm)  
Conductor: 26AWG

\*ALL MATERIALS ARE RoHS COMPLIANT.

 Shenzhen Signal Electronics co.,Ltd		TITLE RJ45 PLASTIC ASSEMBLED CONNECTOR	
		SGN NO	REV.
DRAWN BY	DATE	DWG NO	940008-07-001
CHECKED BY	DATE	CUSTOMER	S0
CHECKED BY	DATE		
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	
		DECIMALES	ANGLES
		.x ±0.50	x.' ±2.0'
		.xx ±0.20	.x' ±1.0'
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET:1 OF 1