

说明:

额定电压: 见附表

绝缘电阻: > 100M Ω

额定电流: 见附表

连接器的接触电阻 $\leq 10\text{m}\Omega$

插拔/周期 >100 cycle

防护等级: IP67

操作温度: $-25^{\circ}\text{C} \sim +125^{\circ}\text{C}$

接线OD: 8~10mm


测试条件

导通阻抗: 0.5 Ω MAX绝缘阻抗: 10M Ω MIN


电 压: DC 5KV/0.1S

注: 1. 6芯 (5+PE) 即为8芯 (7+PE) 闭合PIN2和PIN5


2. 端子④单独包装。

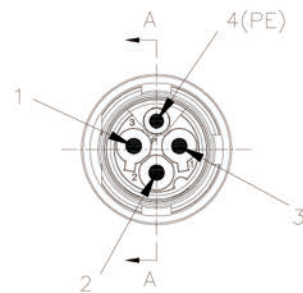

LEFT VIEW

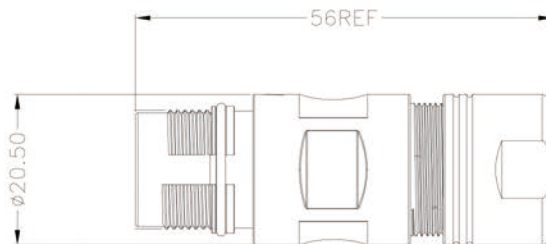

SGN NO	ITEM	PART NO.	SPECIFICATION	Q' TY	电压/V AC/DC	电流/A	LEFT VIEW/1:2
170004-01-001	④	YDTE1144	M17 铆铜镀金压接式公端子 $\phi 2.0 \times 20.1\text{mm}$	4	630	25	
	②	YDCN0975	M17 4P 公头金属装配式尼龙后胶芯 L=14.5mm	1			
	①	YDCN0976	M17 4P 公头金属装配式尼龙前胶芯 L=25.7mm	1			
170006-01-001	④	YDTE1073	M17 铆铜镀金压接式公端子 $\phi 1.0 \times 19.15\text{mm}$	6	630	14	
	②	YDCN0943	M17 8P 金属装配式尼龙后胶芯 L=14.3mm	1			
	①	YDCN0944	M17 8P 公头金属装配式尼龙后胶芯 L=14.3mm	1			
170007-01-001	④	YDTE1073	M17 铆铜镀金压接式公端子 $\phi 1.0 \times 19.15\text{mm}$	7	630	14	
	②	YDCN0940	M17 7P 金属装配式尼龙后胶芯 L=14.3mm	1			
	①	YDCN0941	M17 7P 公头金属装配式尼龙前胶芯 L=25.7mm	1			
170008-01-001	④	YDTE1073	M17 铆铜镀金压接式公端子 $\phi 1.0 \times 19.15\text{mm}$	8	630	14	
	②	YDCN0943	M17 8P 金属装配式尼龙后胶芯 L=14.3mm	1			
	①	YDCN0944	M17 8P 公头金属装配式尼龙后胶芯 L=14.3mm	1			
170009-01-001	④	YDTE1073	M17 铆铜镀金压接式公端子 $\phi 1.0 \times 19.15\text{mm}$	4	630	14	
	②	YDTE1072	M17 铆铜镀金压接式公端子 $\phi 0.6 \times 20.5\text{mm}$	5			
	①	YDCN0871	M17 9P 公头金属装配式尼龙后胶芯 L=14.85mm	1			
	①	YDCN0875	M17 9P 公头金属装配式尼龙前胶芯 L=25.7mm	1			

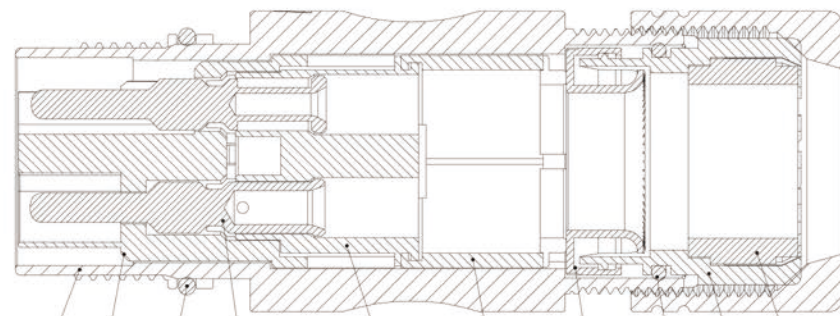

Shenzhen Signal Electronics co.,Ltd

DRAWN BY

DATE

CHECKED BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE

M17 公头金属装配式连接器

SGN NO

见附表

REV.

DWG NO

SO

CUSTOMER

TOLERANCES ARE:

DECIMALES

ANGLES

.x ± 0.5 .x' ± 2.0 .xx ± 0.2 .x' ± 1.0

THIRD ANGLE

PROJECTION

SIZE: A4

UNITS: mm

SCALE: 1:1

SHEET: 1 OF 1