


PROJECT NO:
SGNYD2305007

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/07/04	ZCH
S1	ADDED PART NO.	2023/08/18	ZCH
S2	ADDED CUSTOMER NO.	2023/10/26	ZCH
S3	MODIFIED WIRE GAUGE	2024/01/30	ZCH
S4	ADDED JACKET MARKING	2024/03/11	ZCH

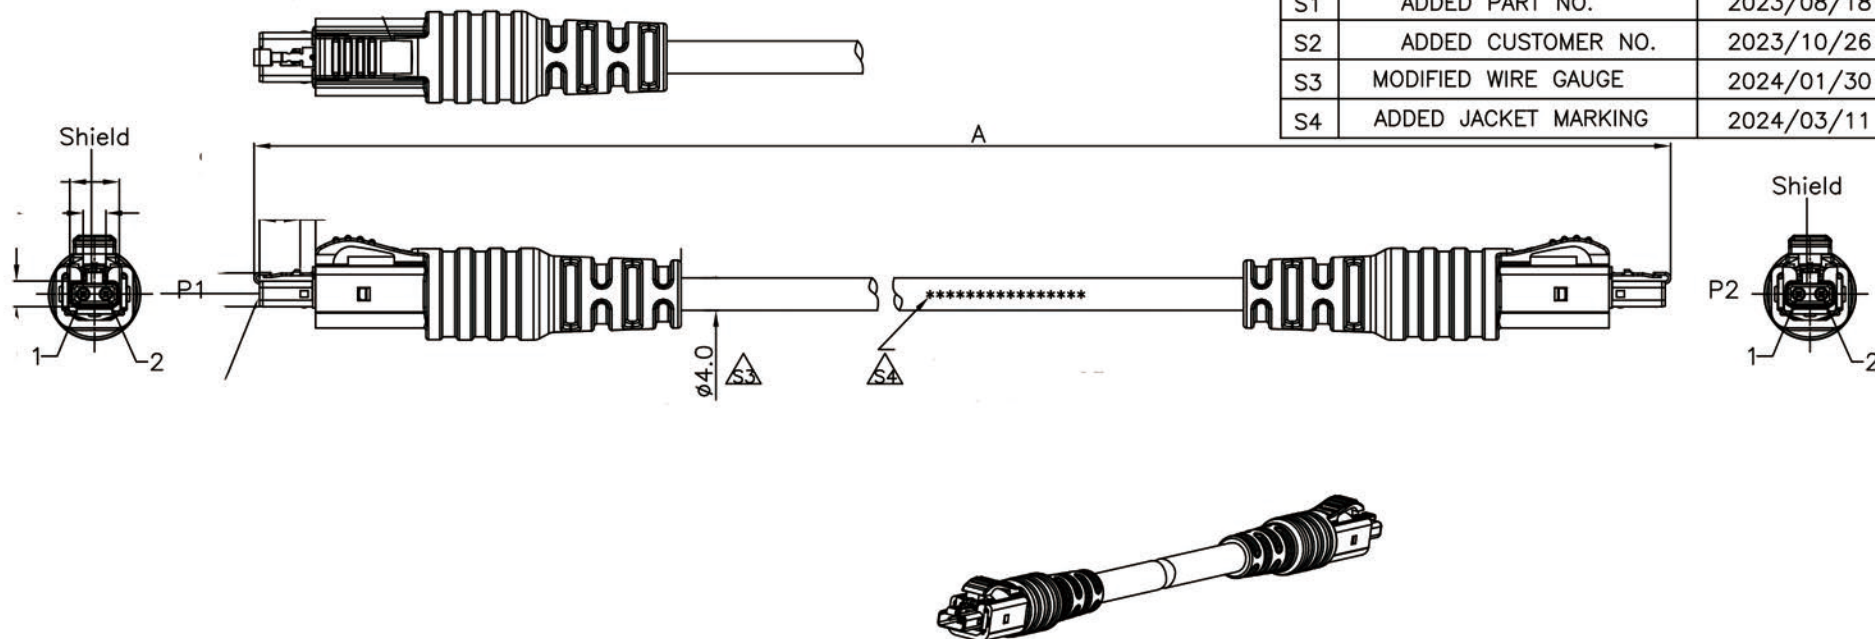

Detailed Product Description:
Waterproof Connector Rating Is IP20
Electrical Character
Rating Voltage: 60V DC
Insulation Resistance: >500M ohms
Rating Current: 4A
Contact Resistance: ≤20m ohms
Shielding Resistance: ≤100m ohms
Other Specification
Cable Diameter: 4.0~6mm
Operating Temperature: -25°C~+85°C
Durability: 1000 Mating Cycles Min.
*All Materials Are RoHS Compliant.

SIGNAL® Shenzhen Signal Electronics co.,Ltd		TITLE CABLE MOLDING, SPE 2PIN PLUG TO PLUG,0.3M	
DRAWING BY	DATE	SGN NO SEE TABLE	REV. S4
CHECKED BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES	THIRD ANGLE PROJECTION
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		.x ±0.5	x.* ±2.0°
		.xx ±0.20	.x.* ±1.0°
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1