


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2020/10/09	ZCH

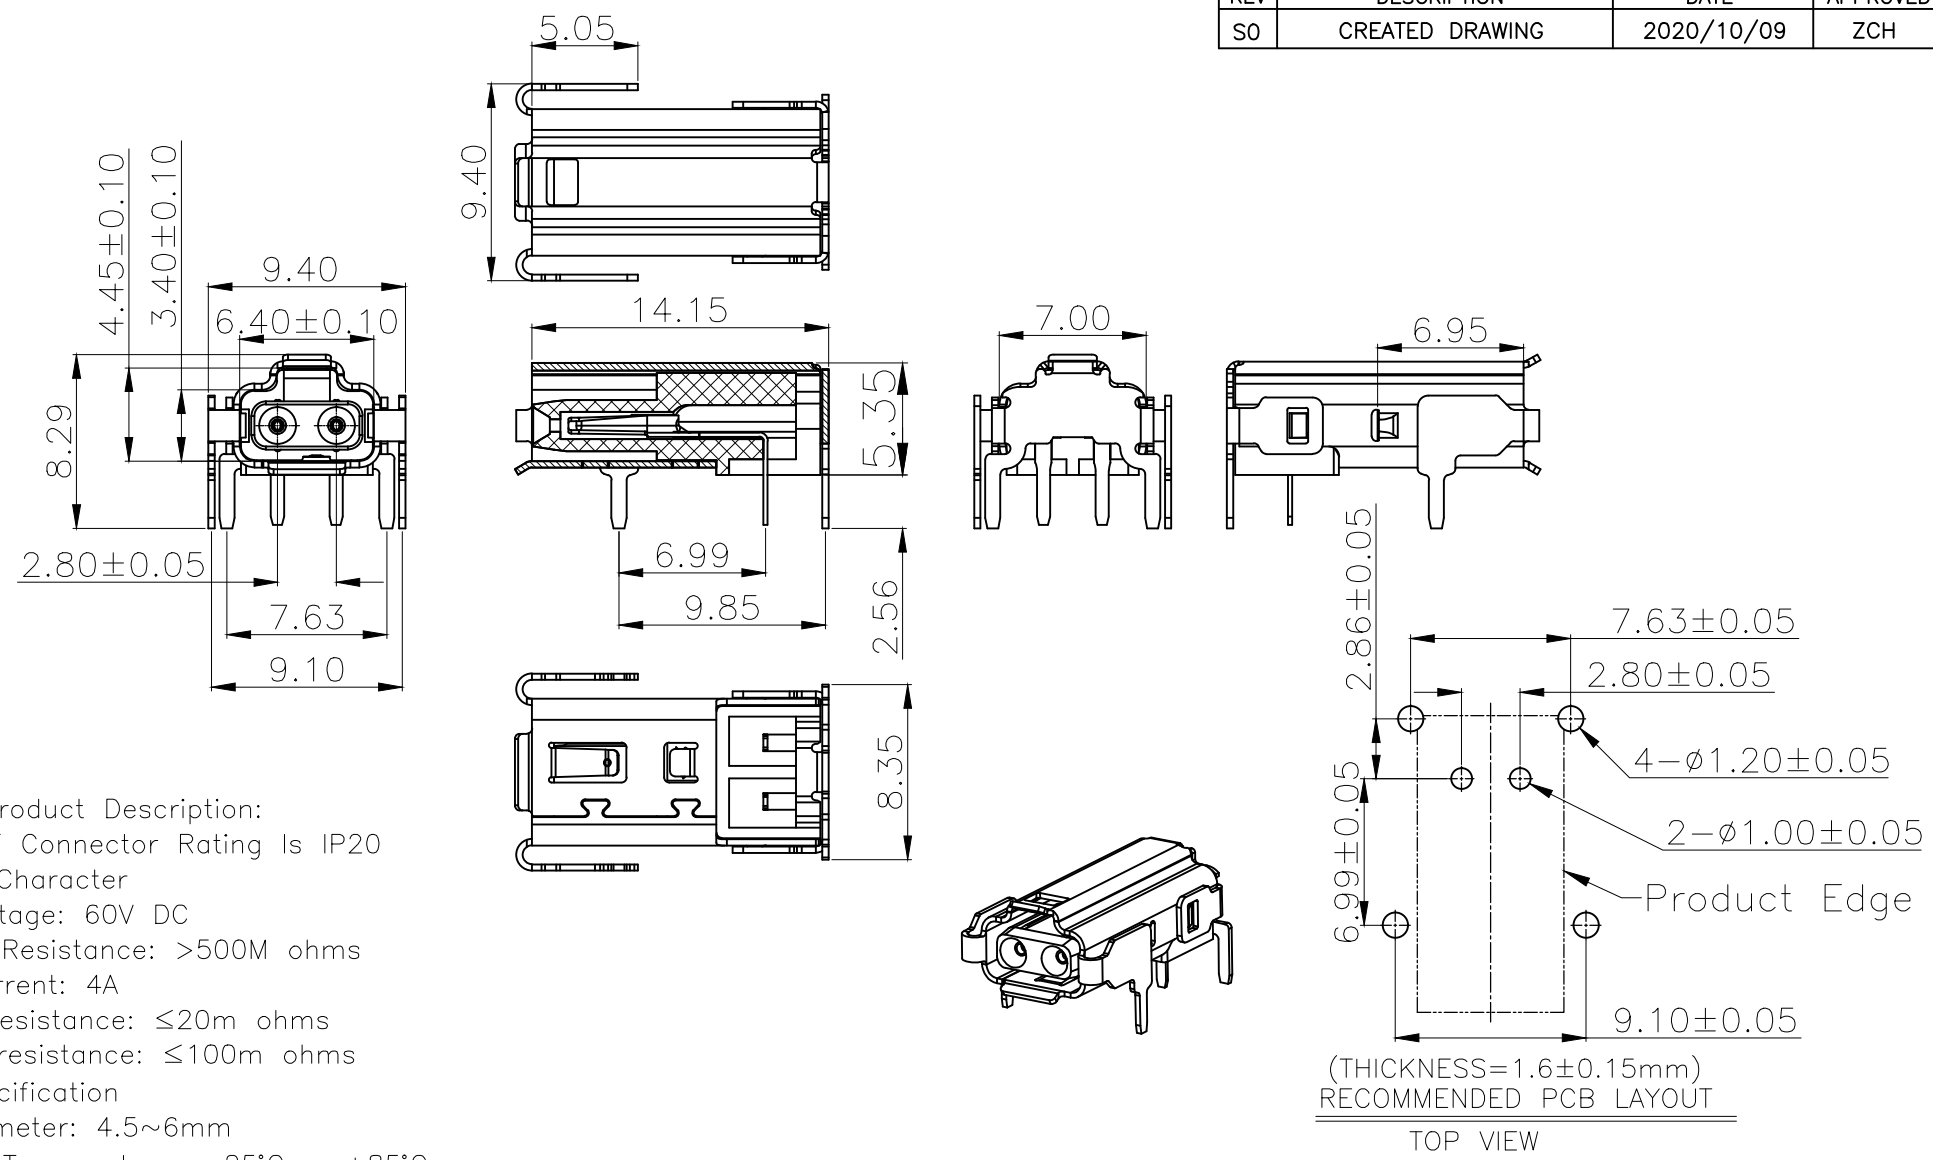

Detailed Product Description:
 Waterproof Connector Rating Is IP20
 Electrical Character
 Rating Voltage: 60V DC
 Insulation Resistance: >500M ohms
 Rating Current: 4A
 Contact Resistance: ≤20m ohms
 Shielding resistance: ≤100m ohms
 Other Specification
 Cable Diameter: 4.5~6mm
 Operating Temperature: -25°C ~ +85°C
 Durability: 1000 Mating Cycles Min.
 *All Materials Are RoHS Compliant.

SIGNAL [®] Shenzhen Signal Electronics Co., LTD		TITLE	
		SPE 2PIN SOCKET CONNECTOR	
DRAWN BY		SGN NO	REV.
CHECKED BY		940000-00-467	
APPROVED BY		DWG NO	S0
DATE		CUSTOMER	
DATE		TOLERANCES ARE:	THIRD ANGLE PROJECTION
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES
		.x ±0.5	x.' ±2.0'
		.xx ±0.20	.x' ±1.0'
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
③	YDTE0829	Socket Contact, Phosphor Bronze, Gold Plated Over Tin On Terminal Area	2	PCS
②	YDTK0104	Housing, PA ,Color Black, UL94V-1	1	PCS
①	YDCN0474	Shield Shell, C2680H ,Gold Plated	1	PCS