



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/09/01	CYF

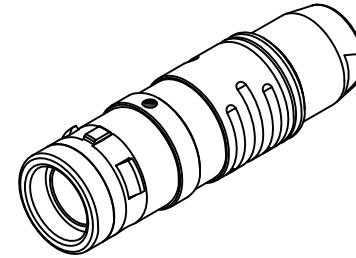



Detailed product description:
 Protection grade: IP66
 Mechanical characteristics: Fit/cycle>4500 cycles
 Working temperature: -50°C~+200°C



Connector material
 Shell + tail cover: Brass
 Locking sleeve: Riveted copper
 Insulation clip: Brass
 Clamp: Riveted copper
 Insulator: PPS
 Terminal: Brass
 O-ring: silicon rubber

*All materials meet ROHS standard.

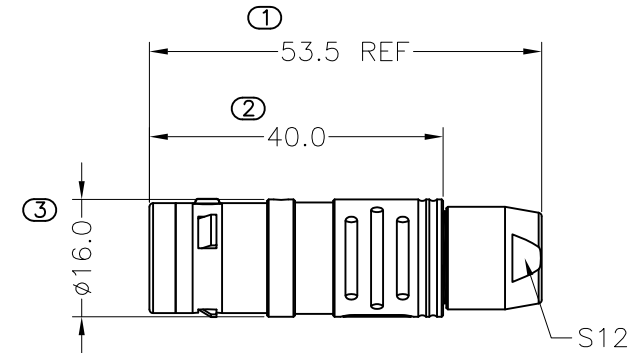

Electrical character

Series	PIN Number (Solder)	Terminal ϕ	Test voltage(KV rms)		Rated current(A)
			Pin-Pin	Pin-Shell	
19	1  19	0.7	0.95	1.25	5.0
26	1  26	0.5	0.95	1.30	2.0

 ShenZhen Signal Electronics co., Ltd		TITLE PUSH PULL SELF LOCK CONNECTOR	
		SGN NO SGNFGG.2K	REV. S0
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE	APPROVED BY	
APPROVED BY	DATE	TOLERANCES ARE:	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		DECIMALES .x ± 0.5 .xx ± 0.20	ANGLES x.' $\pm 2.0'$.x' $\pm 1.0'$
		THIRD ANGLE PROJECTION 	SIZE: A4 UNITS: mm SCALE: SHEET: 1 OF 1