


PROJECT NO:
SGNN2501015-14-2137

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2025/01/15	TANG

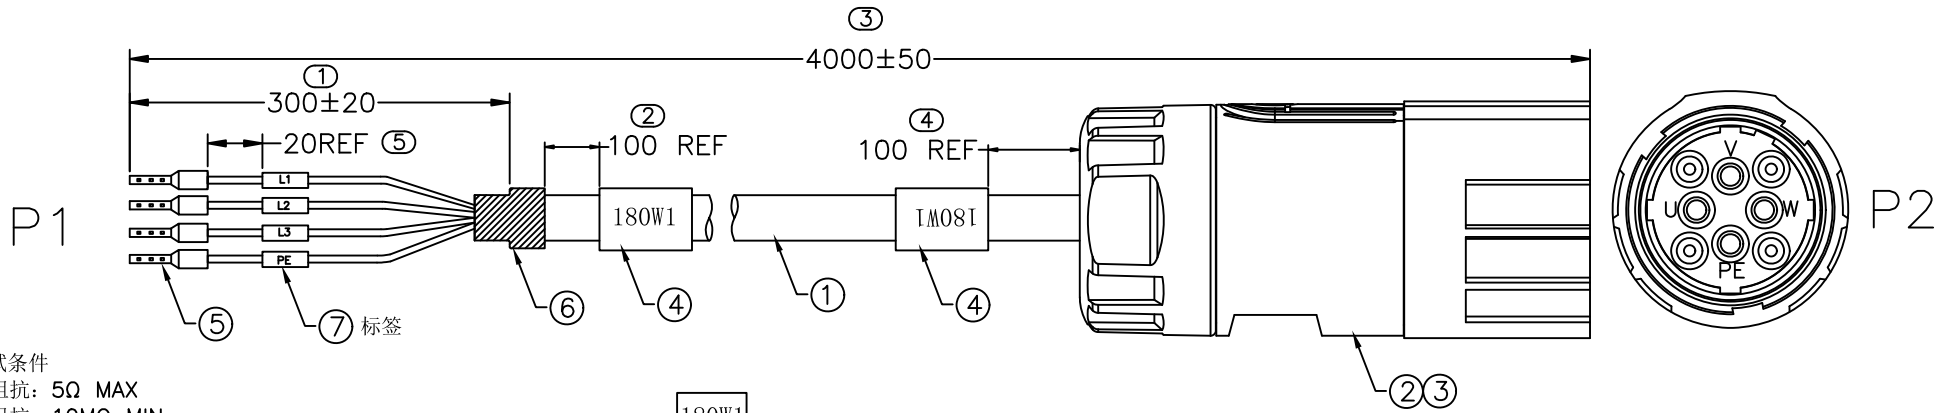

- 说明:
- 成品测试条件
导通阻抗: 5Ω MAX
绝缘阻抗: 10MΩ MIN
电压: DC 300V/0.1S
 - 所有材料都符合RoHS标准。
 - 操作温度: -25°C ~ + 80°C
 - 100%开/短路测试

180W1
标签: 黄底黑字,
字高3.0mm MAX
字体为“黑体”

接线表

P1	颜色	定义/标签	P2
OPEN	黄	L1	U
	绿	L2	V
	红	L3	W
	黄/绿	PE	PE

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
⑦	N/A	白色热缩套管 L=15mm	4	PCS
⑥	HT00080	黑色热缩套管 φ 20mm L=30MM	1	PCS
⑤	N/A	冷压管形端子, 套管范围: (10平方)E10-18	4	PCS
④	YDHT0106	黄色热缩套管 φ 20mm (无印字) L=20MM	2	PCS
③	N/A	客供端子: M40 母端子 TE:60.227.11	4	PCS
②	N/A	客供连接器: M40 4-3+PE 金属快锁连接器 TE:CSTA26NN00250020000	1	SET
①	YDCA0973	4*10mm2 1红、2黄, 3绿, 4黄/绿 外被黑色PVC OD:18.9mm	1	PCS

SIGNAL[®]
Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE 模块供电线 25KW整流模块 380V AC IN接口→本体柜	
SGN NO	940000-00-XXX
DWG NO	SGNN2501015-14-2137
CUSTOMER	W0000T00040
TOLERANCES ARE: DECIMALES ANGLES	THIRD ANGLE PROJECTION
.x ±0.5 .xx ±0.20	x.' ±2.0° .x' ±1.0°
SIZE: A4	UNITS: mm
SCALE: 1:1	SHEET: 1 OF 1