




PROJECT NO:  
SGNN2412029-1

| REV | DESCRIPTION     | DATE       | APPROVED |
|-----|-----------------|------------|----------|
| A0  | CREATED DRAWING | 2024/12/27 | J.TANG   |

- 注意事项:  
1. 测试条件:  
测试阻抗: 5Ω MAX  
绝缘阻抗: 10MΩ MIN  
测试高压: 360V/0.1S  
2. 100%开/短路测试  
3. 处理线材: (1)P1端剥外被3±0.2mm, 另一端剥330±2mm.  
(2)P4/P5(P1)端对应线材, 需先烤热缩管再处理线材.  
防止芯线编织层断开后与外编织短路.  
(3)P5(P1)端中的同轴线外被切口处需套热缩管.  
4. 生产中注意保护好P1端航空插头避免划伤(可做PE膜保护)

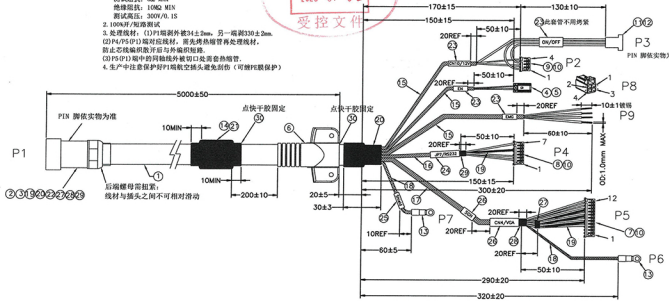

| ITEM | PART NO. | SPECIFICATION | Q'TY | UNIT |
|------|----------|---------------|------|------|
| A    | B        | C             | D    | E    |

**SIGNAL**  
Shenzhen Signal Electronics co.,Ltd

|                          |                  |                                  |
|--------------------------|------------------|----------------------------------|
| DRAWN BY: [Signature]    | DATE: 2024.12.28 | TITLE: VGA示教器5米线 HTRP-EC-01-16A3 |
| CHECKED BY: [Signature]  | DATE: 2024.12.28 | SGN NO: 940000-00-1763           |
| CHECKED BY: [Signature]  | DATE: 2024.12.28 | DWG NO: SGNO1013-1143            |
| APPROVED BY: [Signature] | DATE: 2024.12.28 | CUSTOMER: 03.43.96922            |

TOLERANCES ARE:  
DECIMALS ANGLES  
±0.5 ° ±2.0°  
±0.20 ° ±1.0°

THIRD ANGLE PROJECTION  
SCALE: F  
SHEET: 1 OF 3