
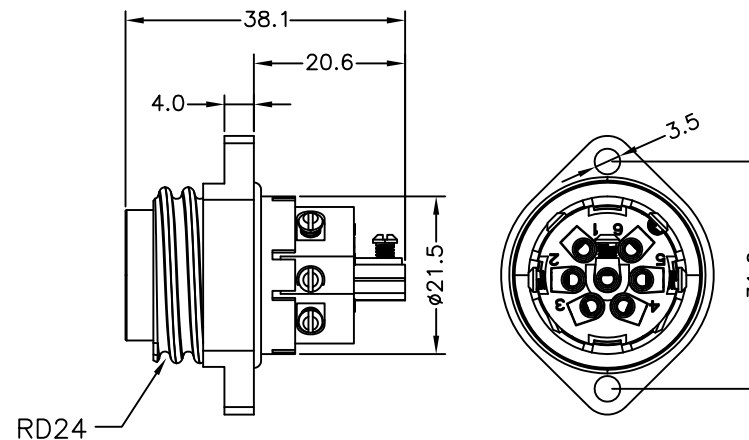
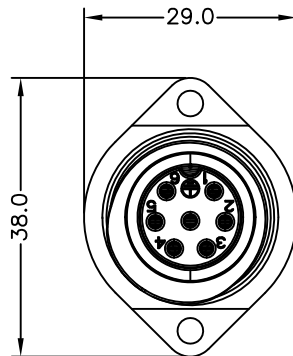


PROJECT NO: SGNYD2204032		REV S0	DESCRIPTION CREATED DRAWING	DATE 2023/10/06	APPROVED CYF
-----------------------------	--	-----------	--------------------------------	--------------------	-----------------



Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water
Per ISO-20653, IEC60529

Electrical character
Rating voltage: 250 AC/DC
Insulation resistance: >100MΩ
Rating current: 8A
Contact resistance of connector ≤10mΩ
Mechanical characteristics: mating cycle >100cycles
Operating temperature: -40°C ~ +85°C

ALL MATERIALS ARE RoHS COMPLIANT

Screw clamp(18AWG~22AWG)

④	N/A	O-RING NBR BLACK	1	SET
③	N/A	TERMINAL MALE COPPER ALLOY GOLD PLATING 3u"	1	SET
②	N/A	STAINLESS STEEL SCREW	1	SET
①	N/A	PLASTIC SHELL NYLON BLACK	1	SET
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

 SIGNAL®		TITLE RD24 6+PE MALE PANEL CONNECOTR 1	
ShenZhen Signal Electronics co., Ltd		SGN NO 240007-03-001	
DRAWN BY	DATE	DWG NO	REV. S0
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20	THIRD ANGLE PROJECTION ANGLES x.° ±2.0° .x.° ±1.0°
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.			
		SIZE: A4	
		SCALE: 1:1	
		UNITS: mm SHEET: 1 OF 1	