
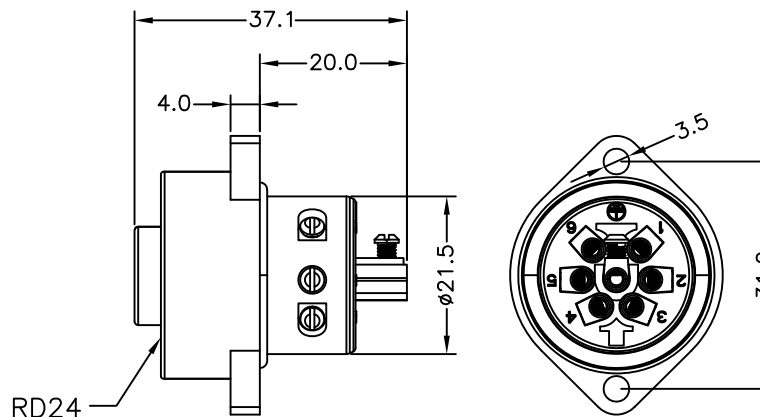
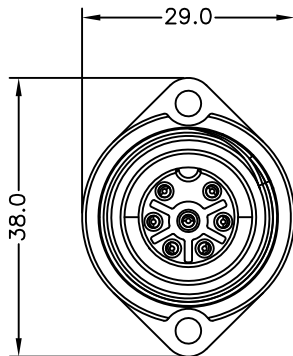


PROJECT NO: SGNYD2204032		REV S0	DESCRIPTION CREATED DRAWING	DATE 2023/10/06	APPROVED CYF
-----------------------------	--	-----------	--------------------------------	--------------------	-----------------



Detailed Product Description:
 Waterproof connector rating is IP67
 They can not be used permanently under water
 Per ISO-20653, IEC60529

Electrical character
 Rating voltage: 250 AC/DC
 Insulation resistance: >100MΩ
 Rating current: 8A
 Contact resistance of connector ≤10mΩ
 Mechanical characteristics: mating cycle >100cycles
 Operating temperature: -40°C ~ +85°C

Screw clamp(18AWG~22AWG)

ALL MATERIALS ARE RoHS COMPLIANT

④	N/A	O-RING NBR BLACK	1	SET
③	N/A	TERMINAL FEMALE COPPER ALLOY GOLD PLATING 3u"	1	SET
②	N/A	STAINLESS STEEL SCREW	1	SET
①	N/A	PLASTIC SHELL NYLON BLACK	1	SET
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

SIGNAL® ShenZhen Signal Electronics co., Ltd		TITLE RD24 6+PE FEMALE PANEL CONNECOTR	
DRAWN BY		DATE	
CHECKED BY		DATE	
CHECKED BY		DATE	
APPROVED BY		DATE	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20 ANGLES x.° ±2.0' .x' ±1.0'	THIRD ANGLE PROJECTION
		SIZE: A4 SCALE: 1:1	UNITS: mm SHEET: 1 OF 1