



PROJECT NO:
SGNW2503032

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2025/03/25	W N

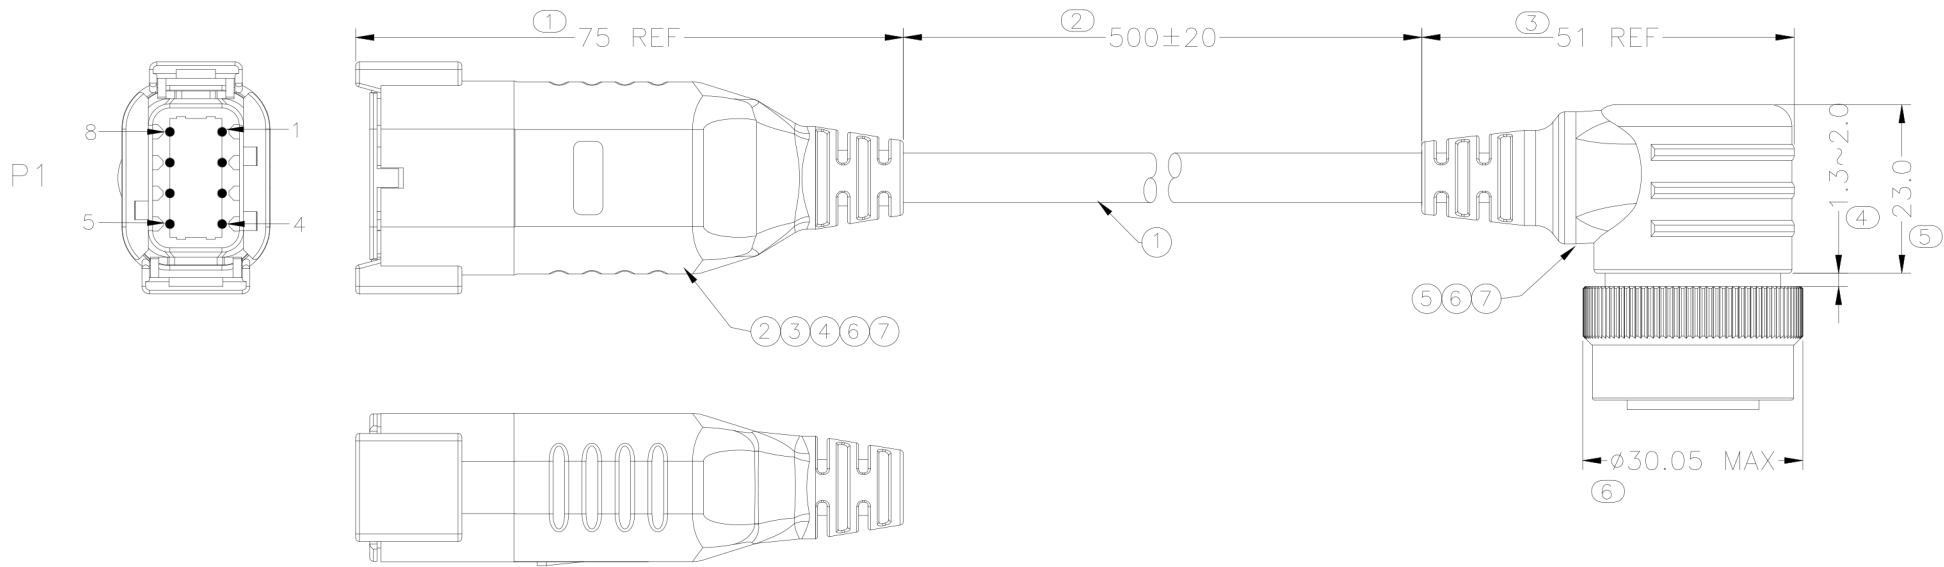

TESTING CONDITIONS:
1. VOLTAGE:300V DC/0.1S.
2. INSULATION RESISTANCE: 10 Mohms min.
3. CONDUCTIVE RESISTANCE: 5 Ohms max.
4.100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

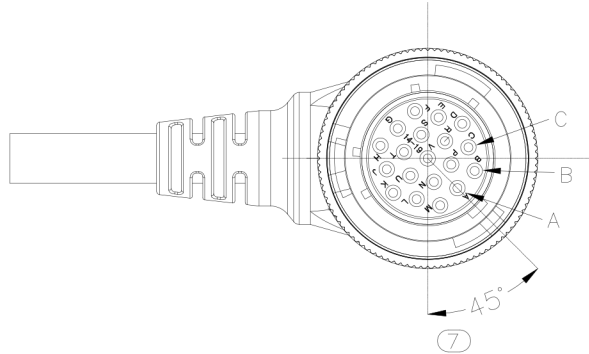

WIRE LIST

P1	PAIR	COLOR	P2
1	XX	WHITE/ORANGE	B
2		ORANGE	U
3	XX	WHITE/GREEN	R
6		GREEN	K
4	XX	BLUE	S
5		WHITE/BLUE	V
7	XX	WHITE/BROWN	N
8		BROWN	L



Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE ATM04-08PA TO MK3116E14-19S CABLE	
SGN NO 940008-00-027	REV.
DWG NO SGNW2503032-3-453	
CUSTOMER	S0
TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20	THIRD ANGLE PROJECTION SIZE: A4 SCALE: 1:1 UNITS: mm SHEET: 1 OF 1