

说明:

1. 电气特性

额定电压: 交流/直流250v,

绝缘电阻: > 100M Ω

额定电流: 4A

连接器的接触电阻 $\leq 5m\Omega$

2. 机械特性: 插拔/周期 >100 cycle




3. 环境特性

防护等级: IP68


操作温度: -25° C ~ + 85° C

4. 所有材料都符合RoHS标准。

5. 单PCS自封袋包装, 包装的标签上需有客户LOGO,
客户料号, 产品名称, 数量, 日期(PE袋标签/外箱标签)。

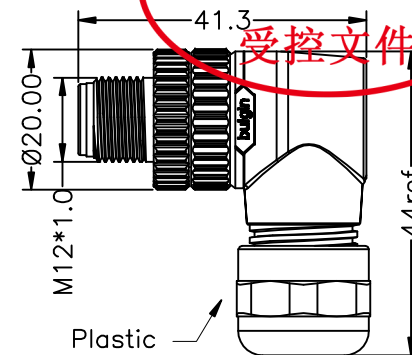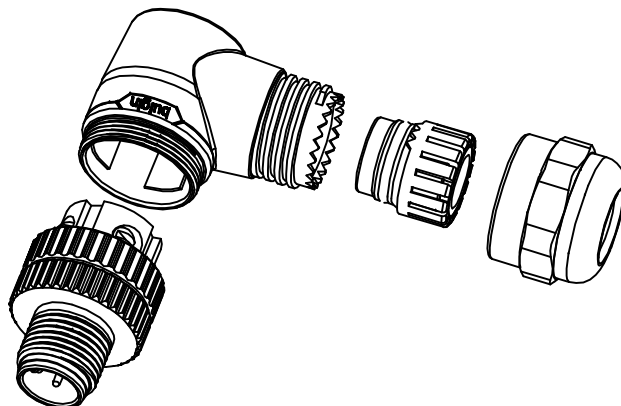


Termination:Screw

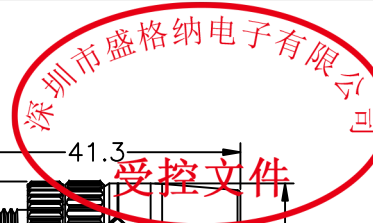

⑬	LB00002	白色铜板纸标签 L*W=50*30mm (PE袋标签)	1	PCS
⑫	CN00406	塑胶装配式卡环 蓝色 带客户LOGO "bulgin"	1	PCS
⑪	OR00012	M12 母头绿色氟胶材质防水胶圈 $\phi 7.00*1.5mm$	2	PCS
⑩	OR00048	绿色氟胶防水胶圈, $\phi 10.0*\phi 1.5mm$	1	PCS
⑨	OR00046	M12尾部密封环 $\phi 11.8*7.5mm$ 绿色氟胶	1	PCS
⑧	WK00173	M12 铝氧化银公头装配式螺母 $\phi 20*14.6mm$	1	PCS
⑦	NU00034	M2.5*0.45 M12装配式螺丝	4	PCS
⑥	CN00253	M12塑胶装配式尾部六角螺母 (PA66+GF黑色)	1	PCS
⑤	CN00252	M12塑胶装配式尾部八爪 (PA66 黑色)	1	PCS
④	CN00284	M12 90度塑胶装配式主体 (PA66+GF黑色)	1	PCS
③	CN00250	M12塑胶装配式固定主体螺母 (PA66+GF黑色)	1	PCS
②	TE00224	$\phi 1.0$ 公针黄铜镀金, 偏心针 L=23.10mm	4	PCS
①	CN00244	M12 4P/M塑胶装配式胶芯 (PA66+GF黑色)	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

单PCS PE袋包装图示

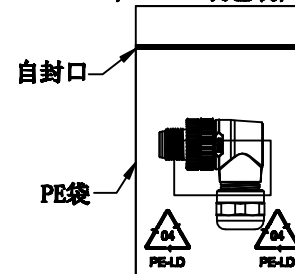

Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M12 assembly male angel connector(plastic)		REV.
SGN NO	120104-01-024E	A0
DWG NO	SGN01024-463	
CUSTOMER	PXPPAM12RAM04ASTPG9	
TOLERANCES ARE:		THIRD ANGLE PROJECTION
DECIMALES	ANGLES	SIZE: A4
.x ± 0.15	x' $\pm 1.0'$	UNITS: mm
.xx ± 0.10	x'' $\pm 0.5''$	SCALE:
		SHEET: 1 OF 1