

说明:

1. 电气特性

额定电压: 交流/直流60v,

绝缘电阻: > 100M Ω

额定电流: 4A

连接器的接触电阻 $\leq 5m\Omega$

2. 机械特性: 插拔/周期 >100 cycle




3. 环境特性

防护等级: IP68

操作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

4. 所有材料都符合RoHS标准。

5. 单PCS袋包装, 包装的标签上需有客户LOGO,
客户料号, 产品名称, 数量, 日期(PE袋标签/外箱标签).

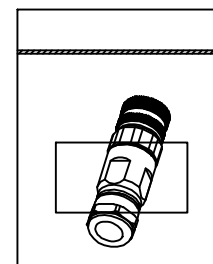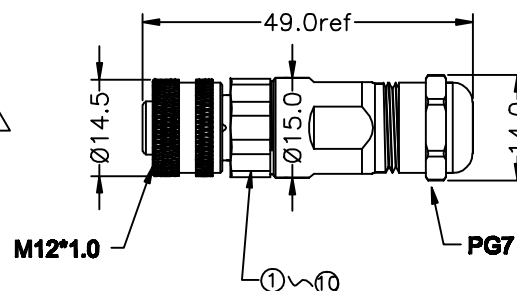

单PCS静电袋包装图示

⑪	LB00002	白色铜板纸标签 L*W=50*30mm (PE袋标签)	1	PCS
⑩	GL00002	黑色耐温慢干A/B胶水 (环氧树脂) $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ (10比3)	1	g
⑨	OR00012	绿色氟胶材质防水胶圈 $\phi 7.00 \times 1.5\text{mm}$	1	PCS
⑧	OR00007	黑色防水胶硅胶圈, $\phi 10.0 \times \phi 1.5\text{mm}$	1	PCS
⑦	OR00005	黑色防水塞 M12*1.5mm	1	PCS
⑥	WK00073	装配式尾部锁线螺帽 4~6(M12 PG7)	1	PCS
⑤	WK00043	M12 黄铜镀镍线端母头装配式卡扣 $\phi 14.78 \times 15.51 \times 8.6\text{mm}$ OD=4~6mm	1	PCS
④	WK00042	M12 黄铜镀镍线端母头装配式螺母 $\phi 14.5 \times 10.5\text{mm}$ OD=4~6mm	1	PCS
③	WK00039	M12 黄铜镀镍线端装配式主体 $\phi 25.85 \times 15.0\text{mm}$ OD=4~6mm	1	PCS
②	TE00061	M12 A TYPE 母端子镀金1u" 线端 $\phi 1.0\text{mm}$ L=20.4mm	5	PCS
①	CN00093	M12 B Coding 5PIN 黑色尼龙 母头胶芯 针孔 $5 \times 1.55\text{mm}$	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT



Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M12 B Coding 5P Female assembly connector

SGN NO	120205-02-001	REV.
DWG NO	SGN01059-463	
CUSTOMER	PXMBN12FBF05BSCPG7	A1

TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES	ANGLES
.x ± 0.5	x' ± 2.0
.xx ± 0.20	.x' ± 1.0
SCALE:	SHEET: 1 OF 1