
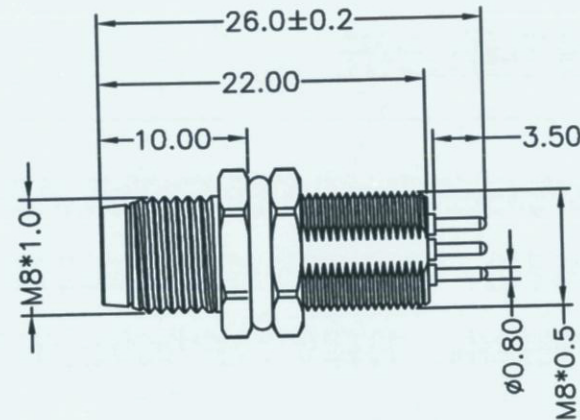


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2022/11/21	ZK



Detailed Product Description:
Waterproof connector rating is IP67
They can not be used permanently under water.

Connector Electrical character
Rating voltage: 60V AC/DC
Insulation resistance: >100MΩ
Rating current : 4A
Contact resistance of connector ≤10mΩ
Mechanical characteristics: mating / cycle >100 cycle
Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

⑥	NU00004	M8*0.5 BRASS PLATED NI NUT L*W=2.0*10mm	1	PCS
⑤	GLO0002	BLACK EPOXY RESIN	1	g
④	OR00012	M8 GREEN VITON CIRCLE ϕ 7.00*1.5MM	1	PCS
③	WK00025	M8 NICKEL PLATED BRASS MALE SHELL	1	PCS
②	CN00815	M8 D CODING 4PIN MALE CONNECTOR	1	PCS
①	N/A	M8 MALE BRASS PLATED OF GOLD TERMINAL L=25.6mm	4	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

 SIGNAL ®		TITLE M8 D 4P/M REAR MOUNT DIP CONNECTOR	
Shenzhen Signal Electronics Co., LTD		SGN NO 080404-03-002	REV.
DRAWN BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE	TOLERANCES ARE:	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES
		.x ±0.5	x." ±2.0"
		.xx ±0.20	.x' ±1.0'
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1