
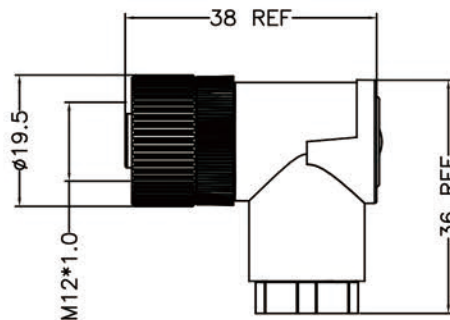


| REV | DESCRIPTION     | DATE       | APPROVED |
|-----|-----------------|------------|----------|
| A0  | CREATED DRAWING | 2022/03/29 | ZK       |



说明:

1.电气特性

额定电压: 交流/直流250V

额定电流: 4A

连接器的接触电阻 $\leq 10\text{m}\Omega$

绝缘电阻:  $> 100\text{M}\Omega$

2.机械特性



插拔/周期  $> 100$  cycle

3.环境特性

防护等级: IP67

操作温度:  $-25^{\circ}\text{C} \sim + 85^{\circ}\text{C}$

4.所有材料都符合RoHS标准。

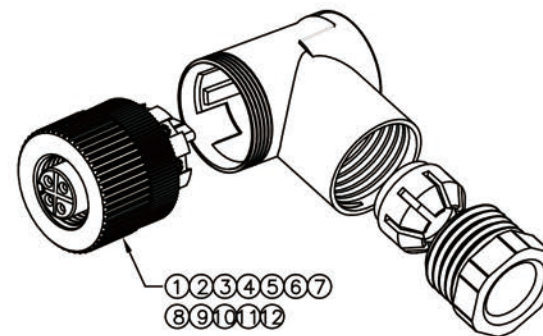

Shenzhen Signal Electronics Co., LTD

|             |      |
|-------------|------|
| DRAWN BY    | DATE |
| CHECKED BY  | DATE |
| CHECKED BY  | DATE |
| APPROVED BY | DATE |

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.  
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M12 A 4P FEMALE PLASTIC ASSEMBLY CONNECTOR(PG9)

|          |               |      |
|----------|---------------|------|
| SGN NO   | 120104-02-004 | REV. |
| DWG NO   | SGN01015-769  | A0   |
| CUSTOMER |               |      |

|                 |                        |                      |
|-----------------|------------------------|----------------------|
| TOLERANCES ARE: | THIRD ANGLE PROJECTION |                      |
| DECIMALES       | ANGLES                 | SIZE: A4 UNITS: mm   |
| .x $\pm 0.5$    | x.' $\pm 2.0^{\circ}$  | SCALE: SHEET: 1 OF 1 |
| .xx $\pm 0.20$  | .x' $\pm 1.0^{\circ}$  |                      |