



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2025/07/10	PWT

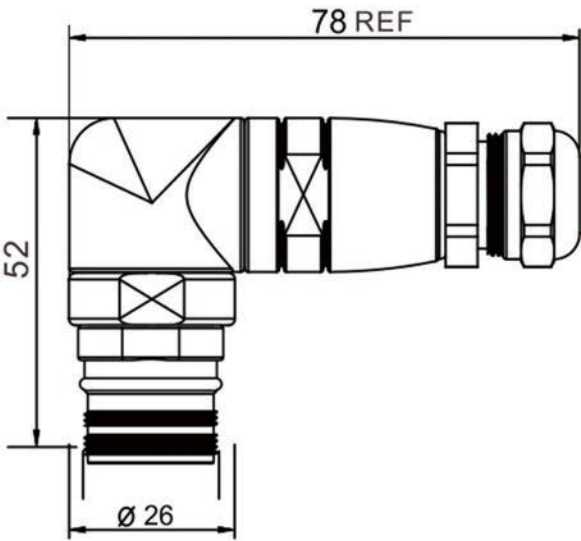

Electrical character

Rated voltage	250V
Rated current	6*8A+3*20A
Mechanical characteristics (mating cycle)	>100
Degree of protection (ISO-20653,IEC60529)	IP67
Operating temperature (depending on cable quality)	-25°C ~ +80°C
Destructive withstand force between connector and overmold exceeds	5kgf
Tightening torque (range)	0.4~1.8Nm
Pollution degree	3

\*ALL MATERIALS ARE RoHS COMPLIANT\*

<div>  <div> <div>Shen Zhen Signal Electronics co.,Ltd</div> <div> <div>DRAWN BY</div> <div>CHECKED BY</div> <div>APPROVED BY</div> </div> </div> </div>	TITLE M23 9PIN(6+3) MALE HEAD METAL ASSEMBLY (M23*1.0)	
	SGN NO 230009-01-004	REV.
	DWG NO	S0
	CUSTOMER	
	DATE	
TOLERANCES ARE:		THIRD ANGLE PROJECTION
DECIMALES	ANGLES	SIZE: A4
.x ±0.5	x.' ±2.0°	UNITS: mm
.xx ±0.20	.x' ±1.0°	SCALE: 1:1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		SHEET: 1 OF 1