






REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2024/11/30	ZHY

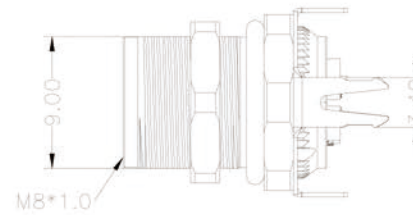


RECOMMENDED PANEL
CUTOUT SIZE



Electrical character

Rated voltage	60V/DC	
Rated current	4A	8A
Mechanical characteristics (mating cycle)	>100	
Degree of protection (ISO-20653,IEC60529)	IP67	
Operating temperature (depending on cable quality)	-25°C ~ +80°C	
Destructive withstand force between connector and overmold exceeds	**kgf	
Tightening torque (range)	0.4~1.8Nm	
Pollution degree	3	
ALL MATERIALS ARE RoHS COMPLIANT		

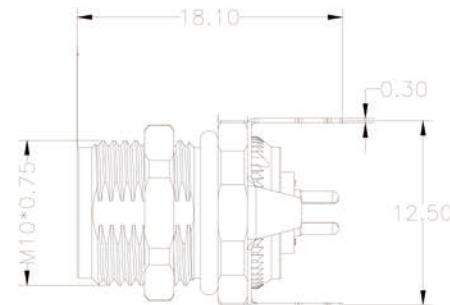

Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE SPE M8 HYBRID,2+2 POLE FEMALE FACEPLATES			
SGN NO	080004-04-001	REV.	
DWG NO		S0	
CUSTOMER			
TOLERANCES ARE:	THIRD ANGLE PROJECTION		
DECIMALES	ANGLES	SIZE: A4	UNITS: mm
.x ±0.50	.x' ±2.0'	SCALE: 1:1	SHEET: 1 OF 1
.xx ±0.20	.x' ±1.0'		