

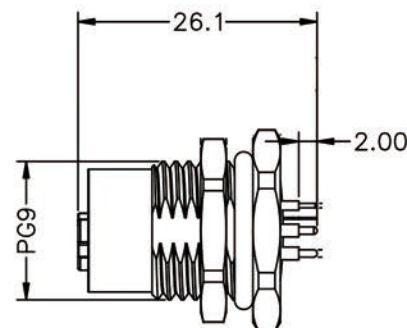


RECOMMENDED PANEL  
CUTOUT SIZE

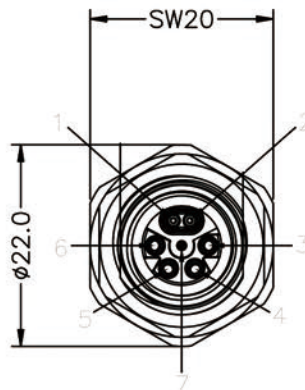

#### Electrical character

Rated voltage	50V/AC,63V/DC	
Rated current	2A	8A
Mechanical characteristics (mating cycle)	>100	
Degree of protection (ISO-20653,IEC60529)	IP67	
Operating temperature (depending on cable quality)	-25°C ~ +80°C	
Destructive withstand force between connector and overmold exceeds	**kgf	
Tightening torque (range)	0.4~1.8Nm	
Pollution degree	3	

\*ALL MATERIALS ARE RoHS COMPLIANT\*



Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE  
PROPERTY OF SIGNAL COMPANY.  
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE  
SPE-I M12 HYBRID 7PIN FRONT  
LOCKING PANEL FEMALE CONNECTOR

SGN NO	121507-04-001	REV.
DWG NO		
CUSTOMER		SO

TOLERANCES ARE: DECIMALES	ANGLES	THIRD ANGLE PROJECTION	SIZE: A4	UNITS: mm
.x ±0.50 .xx ±0.20	x.* ±2.0° .x.* ±1.0°		SCALE:1:1	SHEET:1 OF 1