
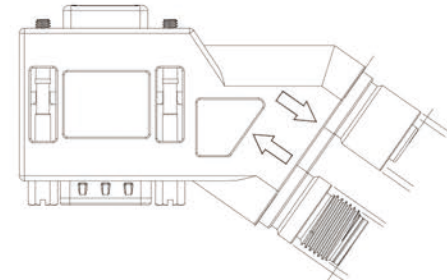
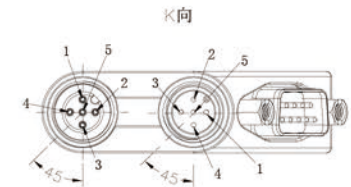

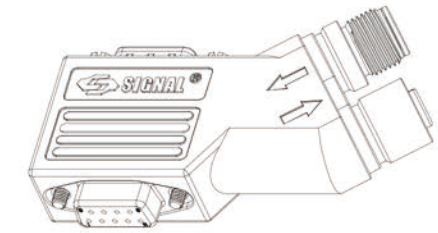



REV	DESCRIPTION	DATE	APPROVED
S0	CREATE DRAWINGS	2023/02/15	CHZ

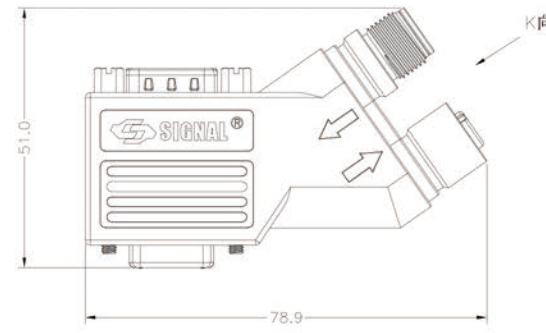

Explanation:

- 1.Electrical characteristics
Rated voltage: 5v
Insulation resistance: >100MΩ
Rated current: 100mA
Contact resistance of connector ≤5mΩ
- 2.Mechanical characteristics: plug/cycle
>200 cycle
- 3.Environmental characteristics
Protection level: IP40
Operating temperature: -20°C ~ + 85°C

CIRCUIT DIAGRAM

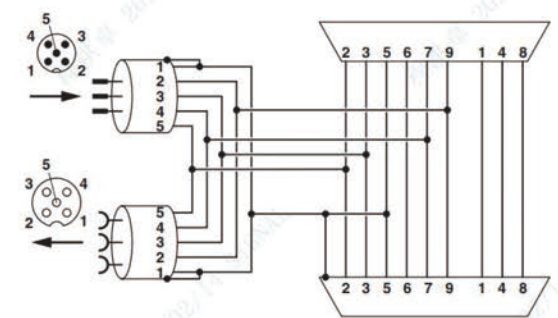

Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE DB9 TURN 2*M12(TYPE A 5-CORE) ADAPTER 90°	
SGN NO 120105-10-081	REV. S0
DWG NO	
CUSTOMER	
TOLERANCES ARE: DECIMALES .x ±0.20 .xx ±0.10	ANGLES x.* ±2.0° x.* ±1.0°
THIRD ANGLE PROJECTION	SIZE: A4 SCALE: 1:1
UNITS: mm	SHEET: 1 OF 1