


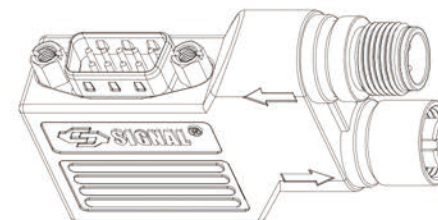



REV	DESCRIPTION	DATE	APPROVED
S0	创建图纸	2023/02/14	CHZ

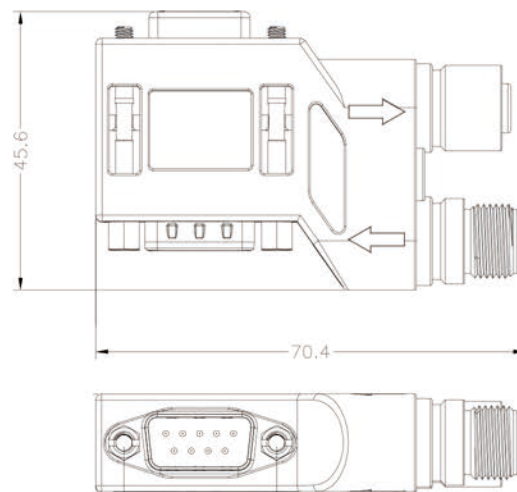

# Explanation:

- 1.Electrical characteristics  
Rated voltage: 5v  
Insulation resistance: >100MΩ  
Rated current: 100mA  
Contact resistance of connector ≤5mΩ
- 2.Mechanical characteristics: plug/cycle  
>200 cycle
- 3.Environmental characteristics  
Protection level: IP40  
Operating temperature: -20°C ~ + 85°C

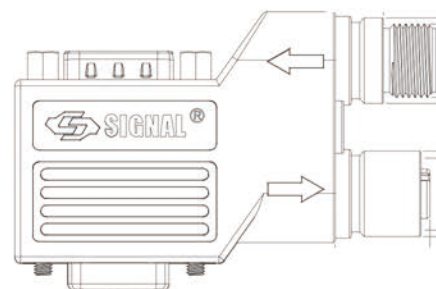

 Shenzhen Signal Electronics co.,Ltd		TITLE DB9 TURN 2*M12(TYPE A 5-CORE) ADAPTER 90° SHORT	
		SGN NO 120105-10-080	REV. S0
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE		
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:	THIRD ANGLE PROJECTION
		DECIMALES .x ±0.20 .xx ±0.10	ANGLES .x° ±2.0° .x' ±1.0°
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET:1 OF 1