
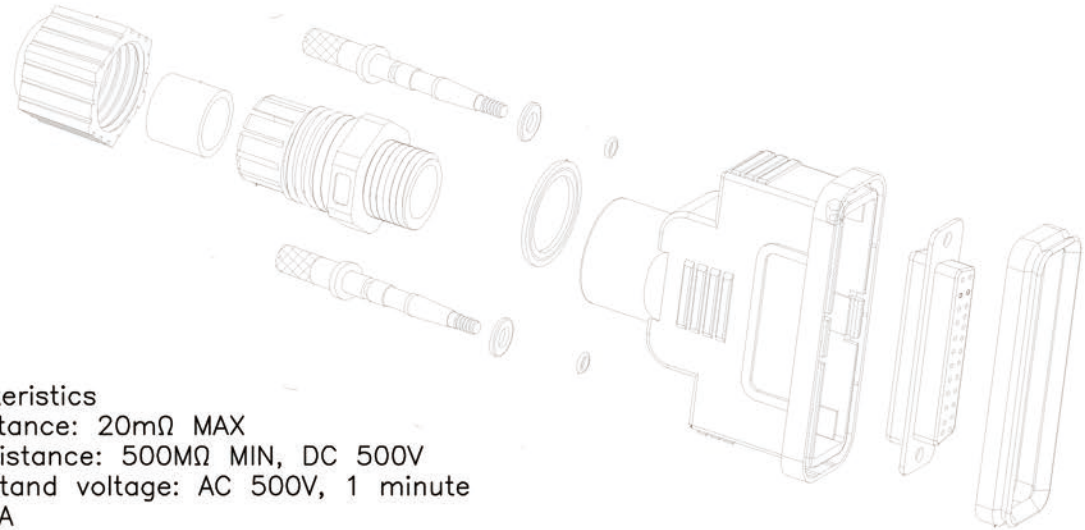
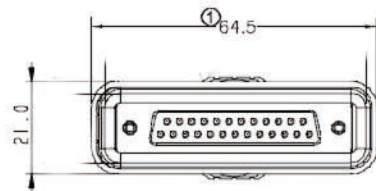


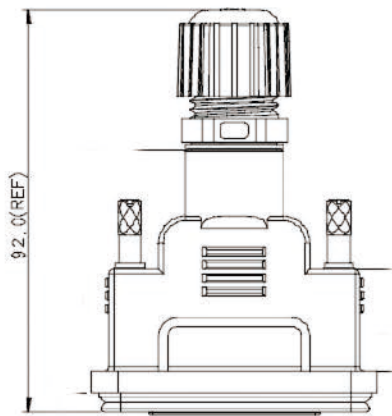

Illustrate:

1. Electrical characteristics

Contact resistance: 20mΩ MAX

Insulation resistance: 500MΩ MIN, DC 500V

Medium withstand voltage: AC 500V, 1 minute

2. Rated current: 2A

3. Durability (lifetime): 500 times

4. Temperature range: -20°C~+85°C

5. All materials comply with RoHS standards.

6. Protection level: connector IP67

7. Applicable cable: Ø3.5mm-Ø7.0mm



Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE
DB 25/F Plastic assembly

SGN NO 910125-02-011

DWG NO
CUSTOMER

TOLERANCES ARE:	THIRD ANGLE PROJECTION	SIZE: A4	UNITS: mm
DECIMALES	ANGLES	SCALE:	SHEET: 1 OF 1
.x ±0.5	x' ±2.0'		
.xx ±0.20	.x' ±1.0'		