


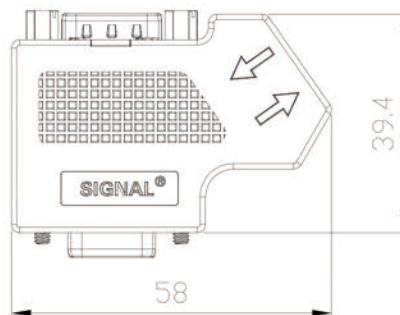


| REV | DESCRIPTION | DATE | APPROVED |
|-----|-----------------|------------|----------|
| S0 | CREATED DRAWING | 2023/03/29 | XD |




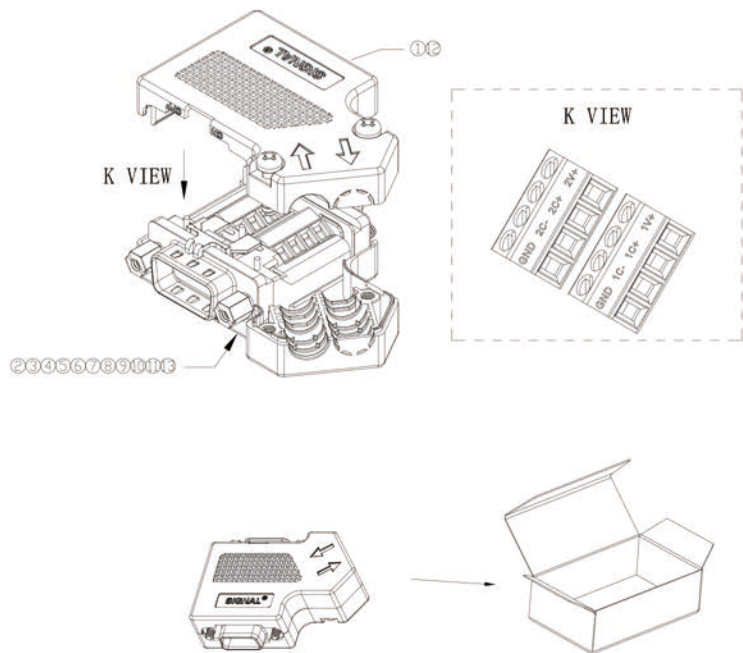

CIRCUIT DIAGRAM

DETAILED PRODUCT DESCRIPTION:
WATERPROOF CONNECTOR RATING IS IP67
THEY CAN NOT BE USED PERMANENTLY UNDER WATER
PER ISO-20653, IEC60529

ELECTRICAL PROPERTIES AT +20°C
RATING VOLTAGE:5V AC/DC
INSULATION RESISTANCE: >100MΩ
RATING CURRENT:100mA
CONTACT RESISTANCE OF CONNECTOR ≤30mΩ
MECHANICAL CHARACTERISTICS: MATING CYCLE >200 CYCLES
OPERATING TEMPERATURE: -25°C ~ +85°C

ALL MATERIALS ARE ROHS COMPLIANT



| | | | | | |
|--|------|----------------------|------------|------------------------|---|
|  SIGNAL ® | | TITLE | | | |
| Shenzhen Signal Electronics co.,Ltd | | D-SUB BUS CONNECTOR | | | |
| DRAWN BY | DATE | SGN NO 940000-00-695 | REV. | | |
| CHECKED BY | DATE | DWG NO SGN01523-0000 | S0 | | |
| CHECKED BY | DATE | CUSTOMER | | | |
| APPROVED BY | DATE | TOLERANCES ARE: | | | |
| THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED. | | DECIMALES | ANGLES | THIRD ANGLE PROJECTION |  |
| | | .x ±0.50 | .x.* ±2.0° | SIZE: A4 | UNITS: mm |
| | | .xx ±0.20 | .x.* ±1.0° | SCALE: 1:1 | SHEET:1 OF 1 |