


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2021/11/20	CRB

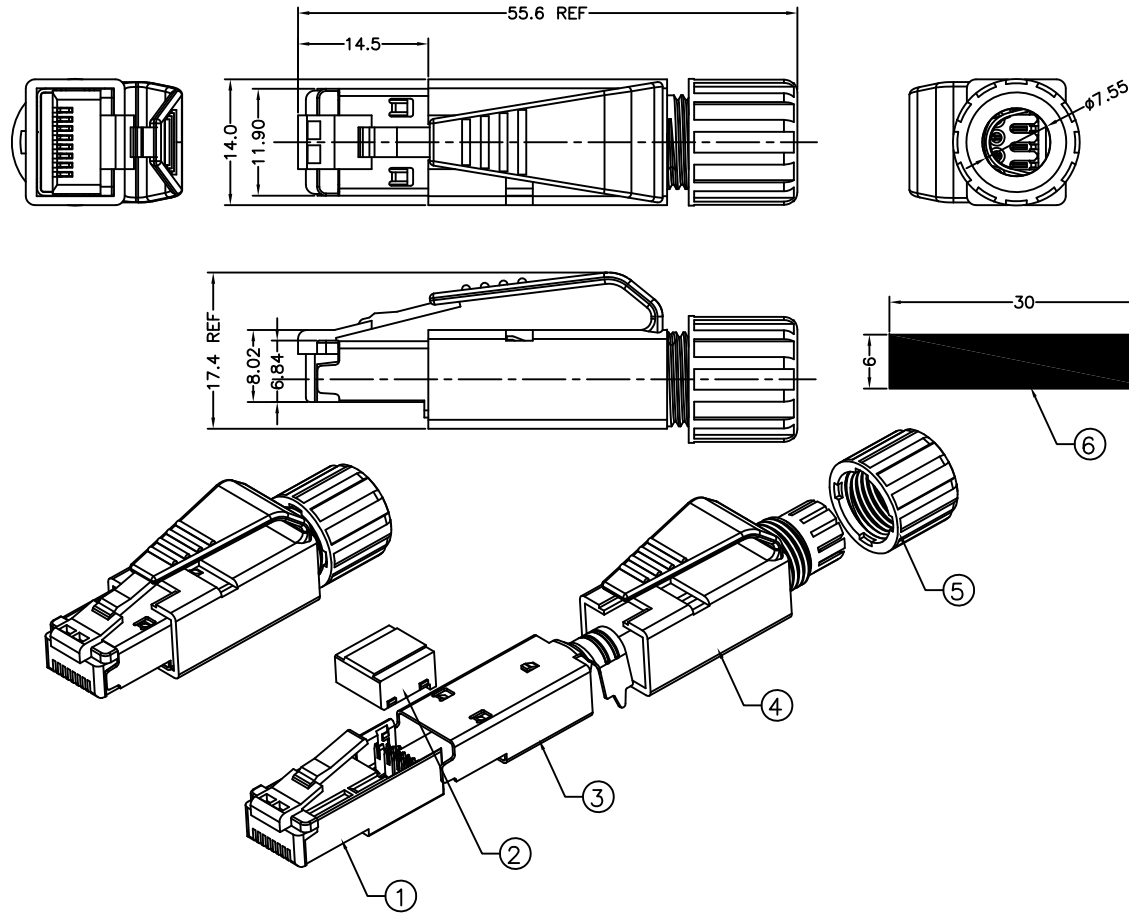

Detailed Product Description
Connector electrical characteristics:
Rating voltage: 30V
Insulation resistance: >1000MΩ
Rating current: 0.5A
Contact resistance of connector ≤30mΩ
Mechanical characteristics: mating / cycle >750 cycle
Operating temperature: -20°C ~ +70°C
Cable OD: 5.0~7.0(mm)
Wire OD: 0.8~1.0(mm)
Conductor: 26AWG

*ALL MATERIALS ARE RoHS COMPLIANT.

⑥	N/A	COPPER FOIL TAPE 30mm*6mm	1	PCS
⑤	N/A	NUT, BLACK NYLON	1	PCS
④	N/A	PLASTIC SHEATH, BLACK NYLON	1	PCS
③	N/A	SHIELDING SHELL, SPCC NICKEL PLATED	1	PCS
②	N/A	CORE CLAMP BLOCK. TRANSPARENT PC	1	PCS
①	N/A	8P8C PLUG, YELLOW INSULATOR	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

 Shenzhen Signal Electronics co.,Ltd		TITLE RJ45 PLASTIC ASSEMBLED CONNECTOR	
		SGN NO	REV.
DRAWN BY	DATE	DWG NO	940008-07-001
CHECKED BY	DATE	CUSTOMER	S0
CHECKED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES .x ±0.50 x.' ±2.0' .xx ±0.20 .x' ±1.0'	
APPROVED BY	DATE		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET:1 OF 1