




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2026/06/27	CZW

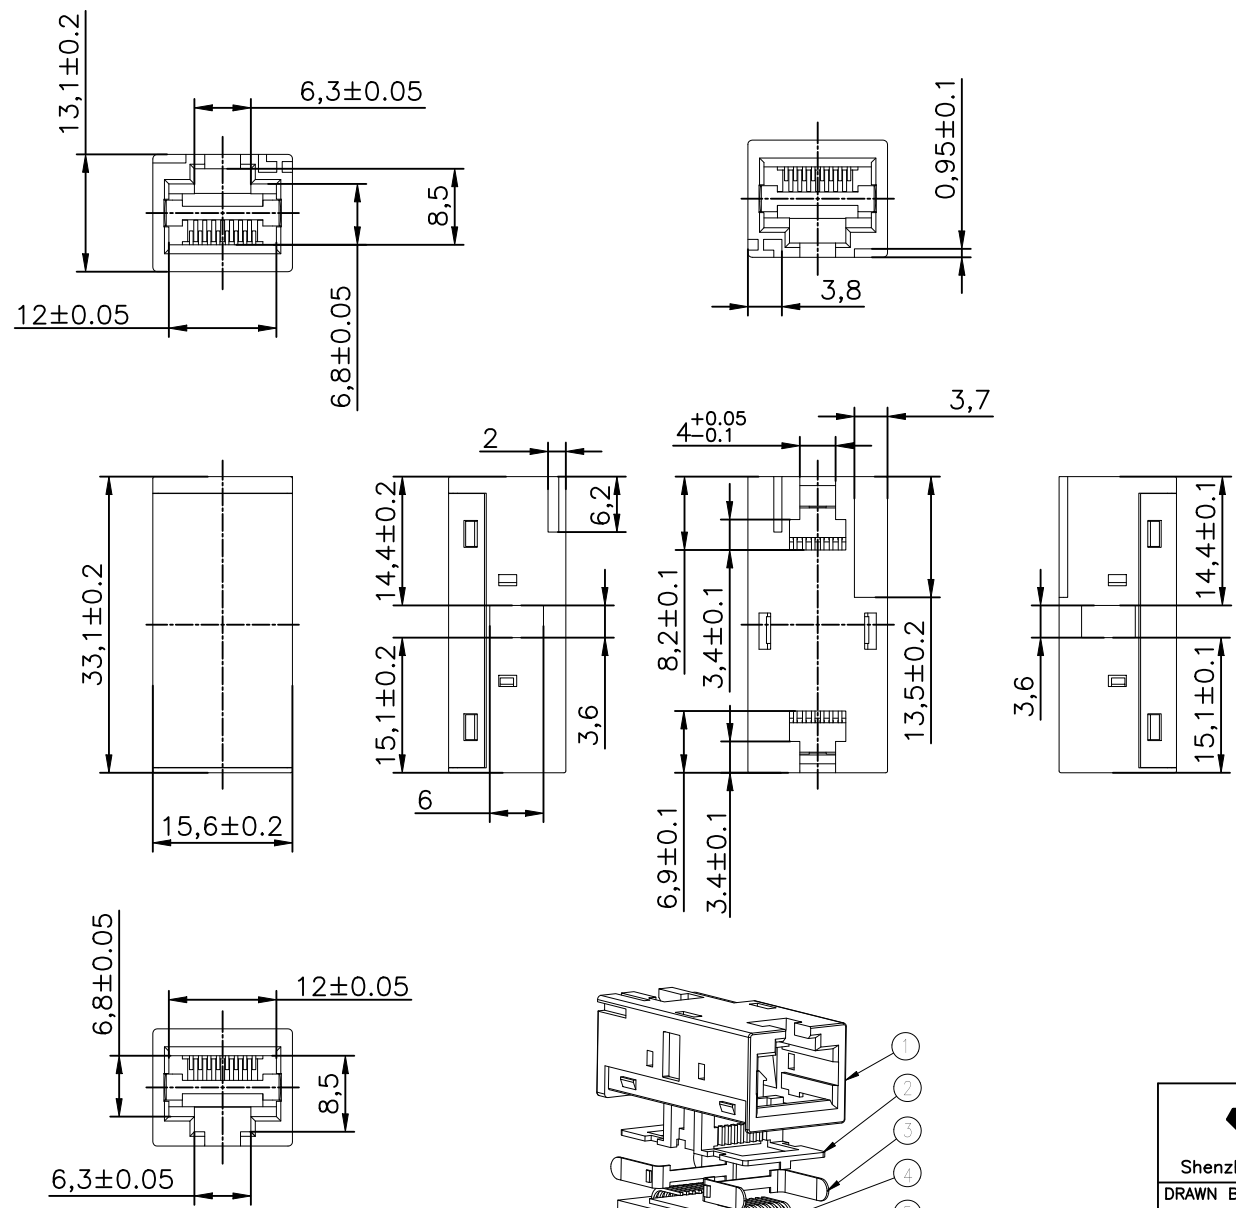

Electrical character

Rated voltage	/
Rated current	/
Mechanical characteristics (mating cycle)	>750
Degree of protection (ISO-20653,IEC60529)	/
Operating temperature (depending on cable quality)	-40°C +70°C
Destructive withstand force between connector and overmold exceeds	**kgf
Tightening torque (range)	/
Pollution degree	3
ALL MATERIALS ARE RoHS COMPLIANT	
PRODUCTS COMPLY WITH IEC61076-2-010	





SIGNAL®

Shenzhen Signal Electronics Co., LTD

TITLE CAT6 ZN ALLOY TOOL-FREE 180° RJ45 COUPLER

SGN NO 940000-07-001

DWG NO

CUSTOMER

TOLERANCES ARE:
DECIMALES ANGLES

THIRD ANGLE PROJECTION

DRAWN BY	DATE	REV.	
CHECKED BY	DATE	SO	
CHECKED BY	DATE		
APPROVED BY	DATE		
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		SIZE: A4 UNITS: mm	SCALE: SHEET: