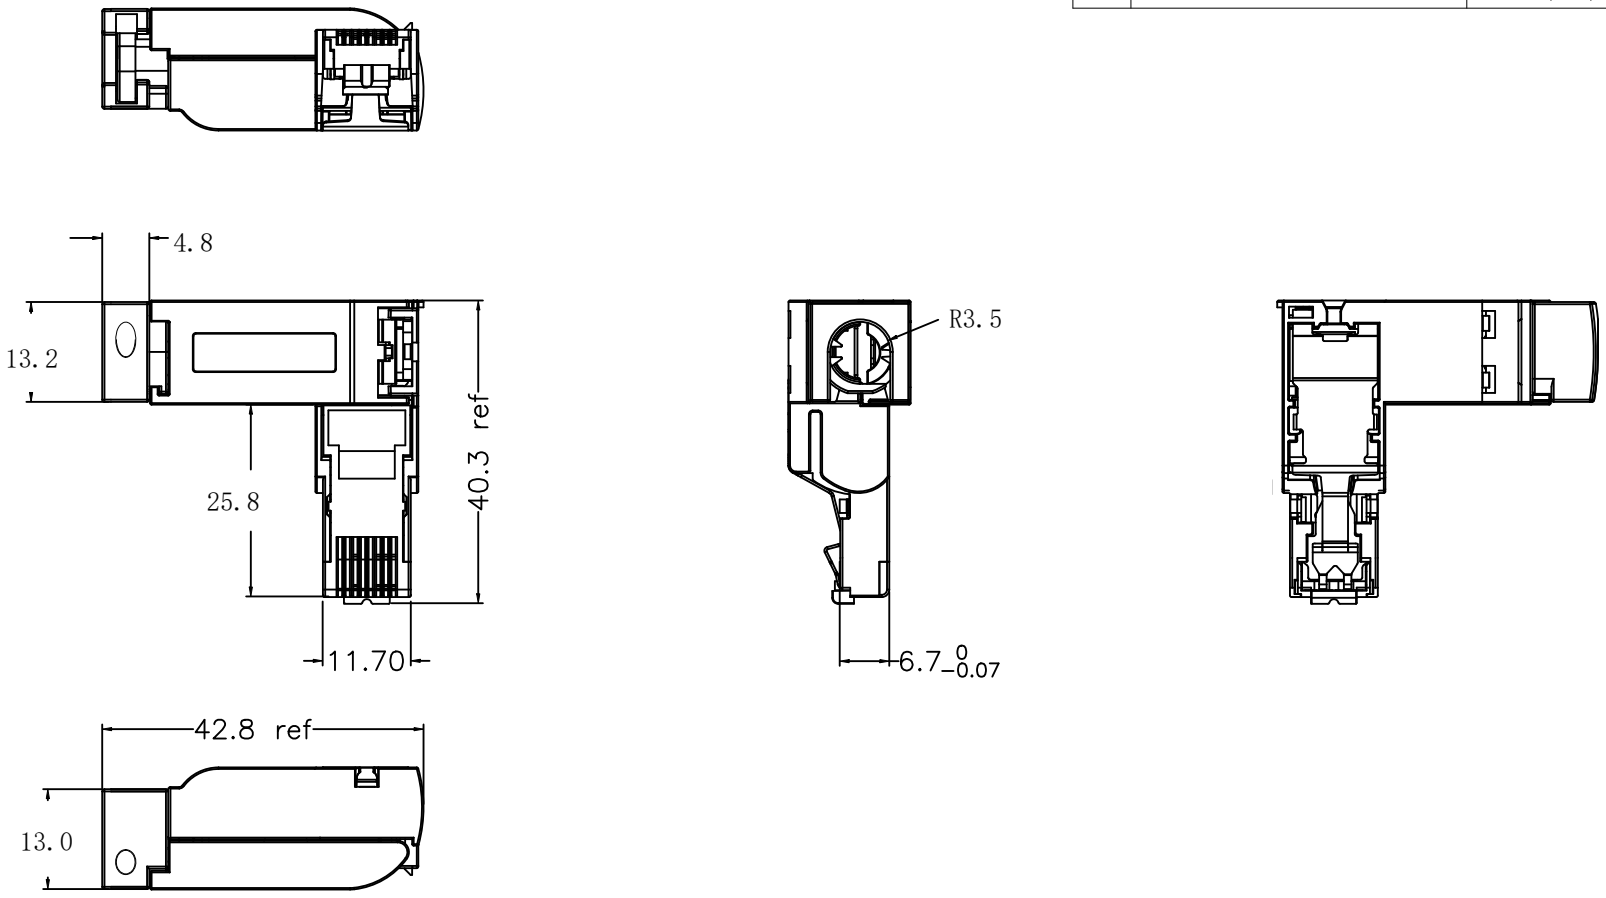




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2023/03/16	LY



CAT5e RJ45 8P4C PLUG TO BE ASSEMBLED IN THE FIELD,TAIL WITH ZINC ALLOY LOCK BUCKLE.

- FTP TYPE:1 PIECE DESIGN
- EASY ASSEMBLY—EASILY TERMINATED IN THE FIELD IN 2 MINUTE WITHOUT ANY SPECIAL TOOLS
- .OPERATION TEMPERATURE:-40°C TO 60°C
- RELATIVE HUMIDITY:85%(30°C),AIR PRESSURE:70-106KPA.
- GOLD PLATED PHOSPHOR BRONZE BLADE:PHOSPHOR BRONZE AND GOLD PLATING(3-50INCH), MATING DURABILITY NOT LESS THAN 500 CYCLES;
- .ANT-BURN PERFORMANCE:PRODUCT MADE FROM KIRSITE/PC
- .RETENTION STRENGTH:7.7KG BETWEEN JACK AND PLUG
- .LABEL:CLEAR LABEL TO ENSURE EASY TO MANAGEMENT
- .WATERPROOF CONNECTOR RATING IS IP20
- .APPLICABLE WIRE OD: 6.0-8.0MM
- .SUITABLE FOR 24-26AWG STRANDED AND SOLID WIRE

 SIGNAL [®]		TITLE RJ45 4pin METAL MALE ANGLE CRIMP ASSEMBLY	
		SGN NO 940004-07-013W	REV.
Shenzhen Signal Electronics Co., LTD		DWG NO	
DRAWN BY	DATE	CUSTOMER	
CHECKED BY	DATE	SO	
APPROVED BY	DATE	TOLERANCES ARE:	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		DECIMALES	ANGLES
		.x ±0.2	x.' ±1.0'
		.xx ±0.15	.x' ±0.5'
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1