
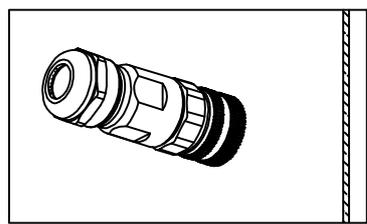
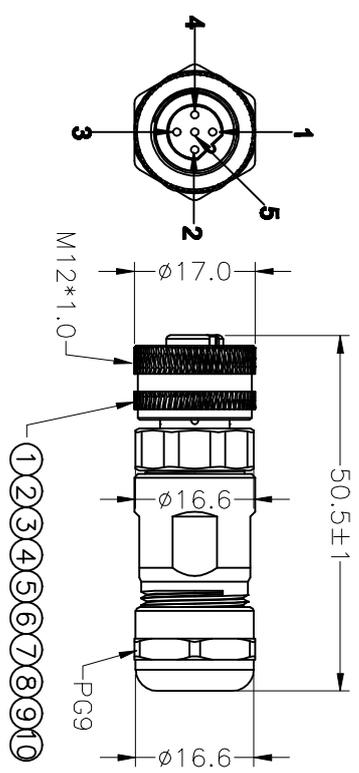


PROJECT NO:
XXXXXXXXXXXX

REV	DESCRIPTION	DATE	APPROVED
AO	CREATED DRAWING	2017/10/17	EUGENE

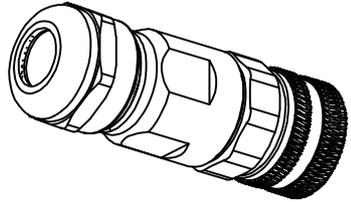

防静电袋，单PCS包装

- 说明:**
- 电气特性**
额定电压: 交流/直流30V,
绝缘电阻: > 100MΩ
额定电流: 按IEC
连接器的接触电阻 ≤ 5mΩ
 - 机械特性:** 插拔/周期 > 100 cycle
 - 环境特性**
防护等级: IP68
操作温度: -25° C ~ + 85° C
 - 所有材料都符合RoHS标准。
 - 用静电袋单PCS包装

⑩	GL00002	黑色耐温慢干A/B胶水 (环氧树脂) -40°C~+90°C	1	9
⑨	OR00012	M12 母头绿色氟胶材质防水胶圈 φ7.00*1.5mm	1	PCS
⑧	OR00007	黑色防水胶建胶圈, φ10.0*φ1.5MM	3	PCS
⑦	OR00006	黑色防水塞 M16*1.5MM	1	PCS
⑦	WK00072	装配式尾部螺线螺帽 6~8(M12 PG9)	1	PCS
⑤	WK00034	M12 黄铜镀镍线端母头装配式卡扣 φ16.63*8.6*9.05mm OD=6~8mm	1	PCS
④	WK00032	M12 黄铜镀镍线端母头装配式螺母 φ17.0*10.5mm OD=6~8mm	1	PCS
③	WK00035	M12 黄铜镀镍线端装配式主体 φ25.85*17.0MM OD=6~8MM	1	PCS
②	TE00061	M12 A TYPE 母端子镀金1u" 线端 φ1.0mm L=20.4mm	5	PCS
①	CN00093	M12 B Coding 5PIN 黑色尼龙 母头胶壳 针孔 5*1.55mm	1	PCS
ITEM	PART NO.	SPECIFICATION	QTY	UNIT



Shen Zhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

TITLE	M12 B 5P CODING FEMALE ASSEMBLY CONNECTOR
SGN NO	120205-02-002
DWG NO	SGN01081-437
CUSTOMER	SM12-PVC-B5F-1B9
TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALS	SIZE: A4
ANGLES	UNITS: mm
SCALE:	SHEET: 1 OF 1