



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2022/11/10	CHZ



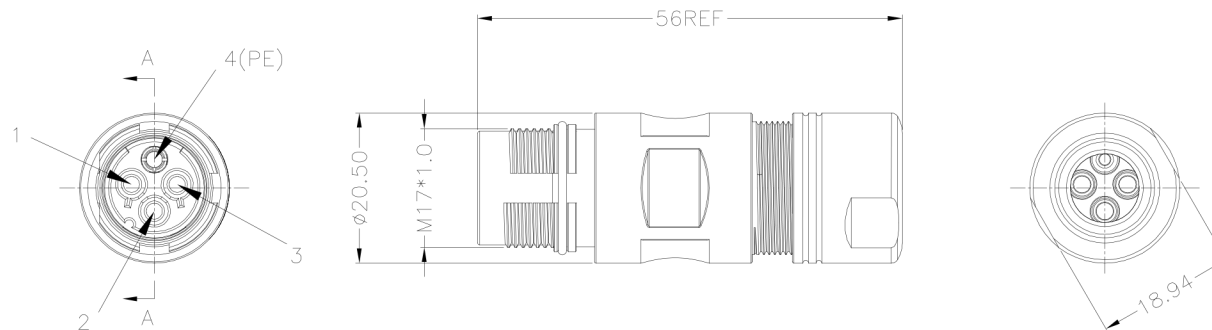

DETAILED PRODUCT DESCRIPTION:  
WATERPROOF CONNECTOR RATING IS IP67  
THEY CAN NOT BE USED PERMANENTLY UNDER WATER  
PER ISO-20653, IEC60529

ELECTRICAL PROPERTIES AT +20°C  
RATING VOLTAGE: 630V AC/DC  
INSULATION RESISTANCE: >100MΩ  
RATING CURRENT: 25A  
CONTACT RESISTANCE OF CONNECTOR ≤5mΩ  
MECHANICAL CHARACTERISTICS: MATING CYCLE >100 CYCLES  
OPERATING TEMPERATURE: -25°C ~ +125°C

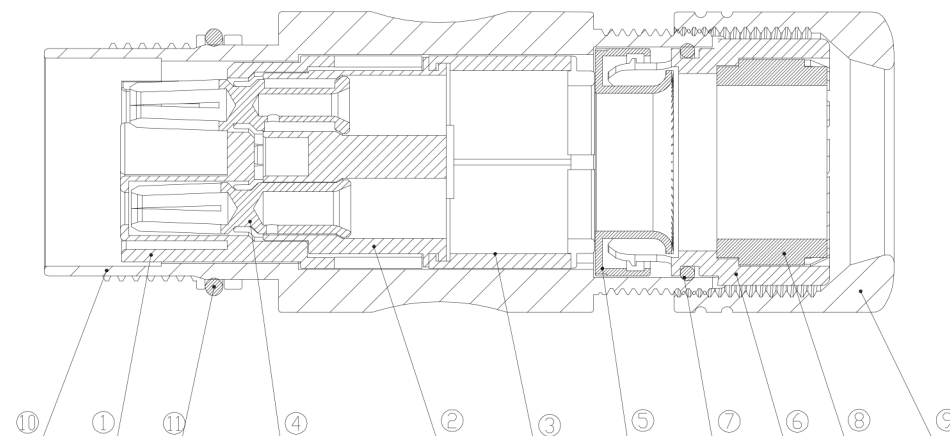THE TERMINALS (④) ARE PACKAGED SEPARATELY  
\*ALL MATERIALS ARE ROHS COMPLIANT\*



截面A-A  
2:1

<div> <b>SIGNAL®</b></div> <div>Shenzhen Signal Electronics co.,Ltd</div>		TITLE M17 4PIN(3+PE) 母头金属装配式连接器	
DRAWN BY	DATE	SGN NO 170004-02-001	REV.
CHECKED BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		.x ±0.5 .xx ±0.2	x.* ±2.0° .x.* ±1.0°
		THIRD ANGLE PROJECTION	
			
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1